

POWER LOG

2016 Imperial Tutorial



The Intelligent Geological Software Solution

Suite 200, 638 – 11th Avenue S.W.

Calgary, Alberta T2R-0E2

Phone: (403) 777-9454

Website: www.powerlogger.com Email: info@powerlogger.com

Table of Contents

Introduction	4
The Toolbar	4
The Selection Bar	4
The Status Bar	5
The Import Toolbar	5
The Export Toolbar	5
Connecting to the Database	6
Creating a new Well / Log	6
The System Options Window	11
General Tab	11
Fonts Tab	12
Display Tab	13
Favorites Tab	15
The Log Configuration Builder window	16
Fundamentals of the Log Configuration Builder Window	17
Deleting the Date and the Framework tracks on the Tutorial Log	18
Adding a Slide - Rotate Track to the Tutorial Log	18
Resizing a track	18
Moving the Oil Show track	18
Deleting the Gas Annotations layer from the Drilling Progress track	18
Turning off a track	19
Resizing and Configuring the Drilling Progress Track	19
Importing ASCII File Data into the Drill Rate & Total Gas curve layers:	19
Changing Curve Scales	21
Adding Sample Descriptions	23
Printing out Sample Descriptions to Word. (Only if you have Word for Windows)	25
Printing out Sample Descriptions (If you do not have Word for Windows)	25
Drawing Interpreted Lithology	26
Deleting a Single Rock Type or Bed	27
Deleting Multiple Rock Types or Beds	27
Editing Lithology Descriptions	28
Overview of RTF Font Toolbar buttons	28
Overview of RTF Lines and Boxes Toolbar buttons	29
Drawing Porosity (%)	31
Drawing Grain Size	31
Drawing Oil Shows	32
Drawing Sorting	32
Drawing Rounding	33
Drawing Porosity Type	33
Drawing Slides on the Slide / Rotate Track	34
Drawing Accessories	34
Adding a Cored Interval to the log	37
Adding Core Descriptions	37
Editing Core Descriptions	39
Moving and changing the Display Scale options	40
Changing the Display Scale options	40
Moving Core descriptions	40
Resize the Moved Annotations to fit the track width	40
Deleting Core Descriptions	40
Adding a Core Rate curve layer to the log	41
Importing an LAS Core Rate Curve data file	42
Overview of window	42
Importing LAS Curve Data files	43
Adding Coring Times to the existing Drill Rate curve	43
Adding a Formation Top	46

Adding Annotations 47

Adding a Curve Fill layer to an existing log..... 48

 Setting up the (2) Two Curve Fill options 49

 Layers Organizer 49

How to Print the Log to a Printer Driver. 52

How to Print the Log to a TIFF (file format)..... 54

Adding a Link (Attachment) to your Log..... 56

Introduction

Power*Log™ (Petrographical Office Wellsite Evaluation and Reporting) is a chip and core logging management program that utilizes single-entry data capturing to produce geological striplogs. The geological data is entered into the system through the use of intuitive data entry forms to ensure standardization of data. This data is stored in an RDBMS(Relational Database Management System) to allow data manipulation using SQL access tools.

Power*Log™ software consists of four (4) main parts:

- 1.) A log editor module that allows you to change the striplogs to suit your needs and preferences.
- 2.) A data transfer module.
- 3.) Report printing modules.
- 4.) An on-line help system that is designed to familiarize you with the commands and functions available in **Power*Log™** and lead you through many of the processes involved in creating welllogs.

A note about navigating through Power*Log™ Reports:


When you are entering information into data forms, you may move between boxes/fields by **pressing the Tab key** to go forward and **Shift +Tab keys** to move backwards. To exit forms that do not have an **Exit, OK, or Cancel** button, **press the Esc key** on the keyboard.

To access the On-line Help System in Power*Log™:


You can make use of the context sensitive help by **pressing the F1 key** when you are in a dialogue box. A pertinent help file will appear, opened to the topic relevant to the dialogue box you are in.

Below are some examples of common features within Power*Log™:


The Toolbar

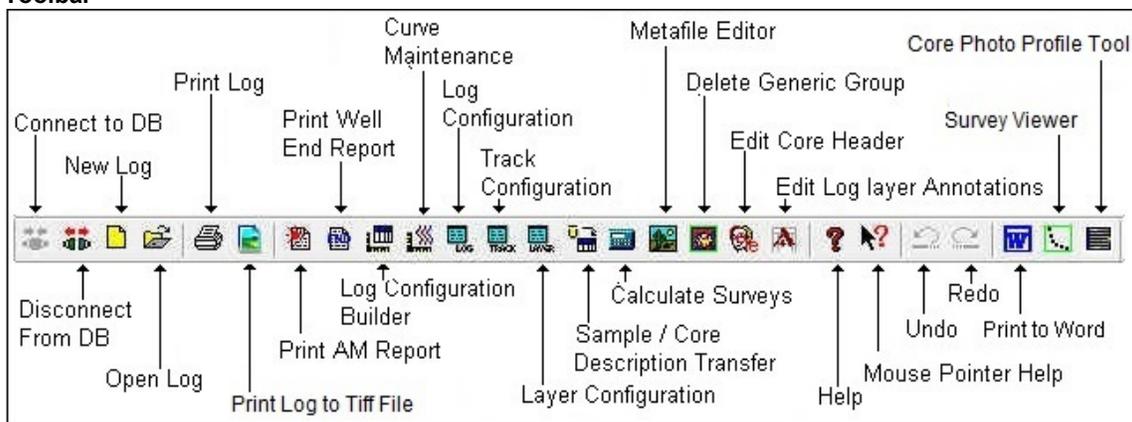

The Selection Bar...

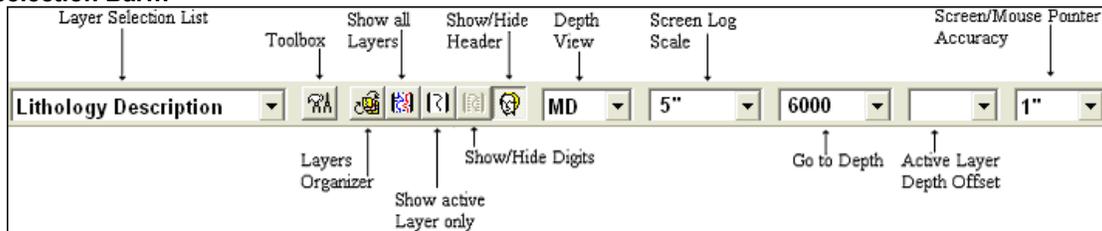

Selection Bar Using the Default American Style Inches Screen Scale

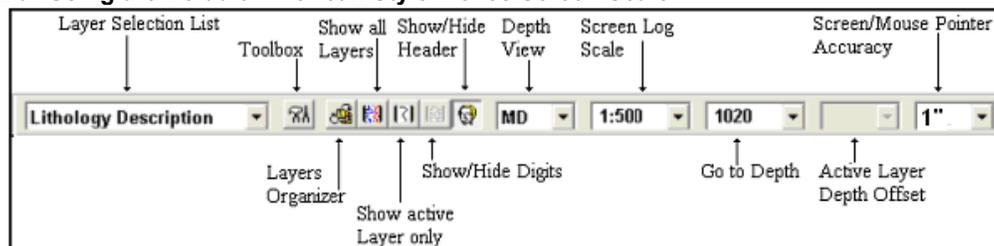

Selection Bar Using the Ratio Style Selection for Screen Scale



The Status Bar...




The **Status Bar** displays system status messages and any error message (associated with a field entry), in the far left corner. The KB elevation is displayed in the lower right corner of the **Status Bar**.

The Import Toolbar

This toolbar is dock able and can be moved to different places on the screen.


The Power*Log / Core & Curve™ Import Toolbar...

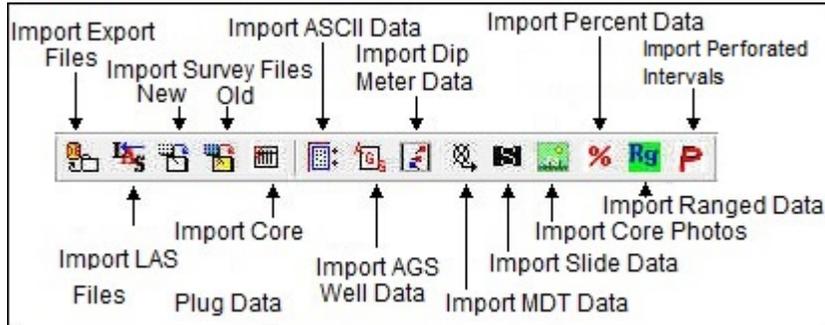


The Export Toolbar

This toolbar is dock able and can be moved to different places on the screen.

The Power*Log / Core & Curve™ Export Toolbar...

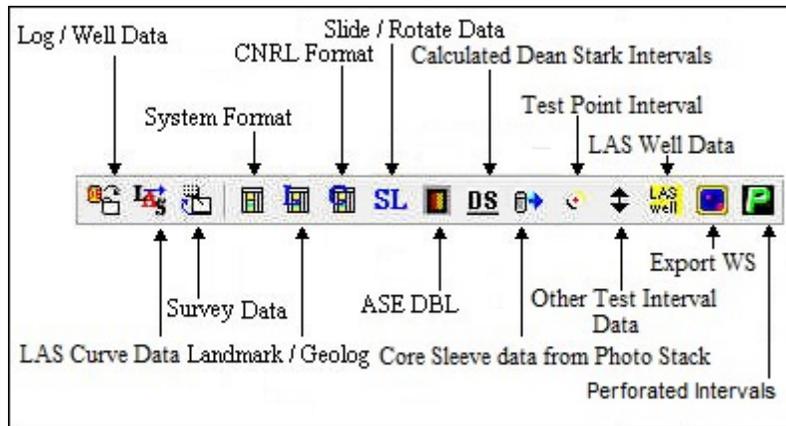

Button, Check box and drop box types.

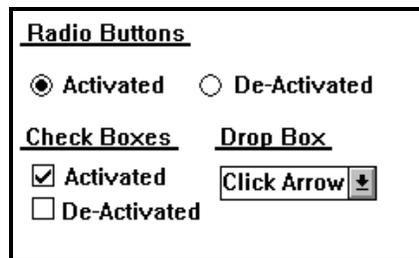

The Four (4) Main On-line Help System Categories:

Commands - Descriptions of each menu command within Power*Log / Core & Curve™.

Toolbar - Shortcuts to common commands are explained.

Database Table Operations - Commands or functions related to the Database Table are described.


Quick Reference Guide - The portion of the On-line Help System that quickly refers you to some of the more commonly performed tasks


This tutorial will guide you through the process of creating and editing a new striplog (hereafter referred to simply as a log), with curves and interpreted lithology.

Connecting to the Database



- 1.) **Double click** on the **Power*Log** **2016** **Icon**. Acknowledge the Security Information window by **clicking** on the  **button**. This will initiate the program and activate a **Connect Database** window.

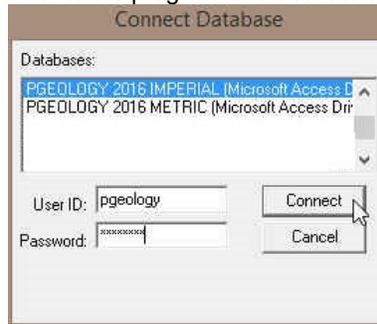


- 2.) Highlight the **PGEOLOGY 2016 IMPERIAL (Microsoft Access Driver[*].mdb)]** database by **clicking** on it once.
- 3.) Move your mouse pointer to the **User ID** field and **click**. This will activate a flashing cursor in the **User ID** field. **Type "pgeology"** in the **User ID** field. **Press** the **Tab** key on the keyboard to move to the **Password** field.
- 4.) **Type "pgeology"** in the **Password** field and then **click** on the  **button**. The program will now load various dictionaries and then activate an **Open Log** window.


Creating a new Well / Log



The first step in creating a new log is to **click** on the **New Log button** on the **Toolbar** or to **select New** under **File** on the **Selection Bar**. This will open the **New Log** window on the next page.

This more than likely will appear after connecting to the Database without you have to do the above procedure if this was the first time you have activated Power*Log.

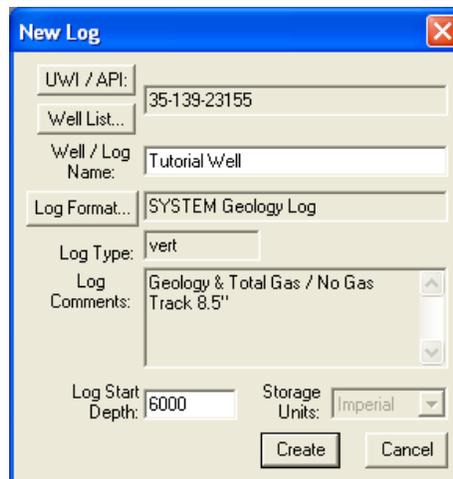


- 1.) The **Well/Log Name** field is where you enter the name of the well (no more than 50 characters long). **Type "Tutorial Well"** into the **Well / Log Name** field.
- 2.) **Click** on the  **button** to activate the **UWI Format** window.

- 4.) The default or flashing caret is in the API Code / Name field. **Type** in “35-139-23155”. The 23 is a State Code, the 139 is a County Code, the 20130 is the Unique Well ID.
- 5.) **Click** on the  **button** when you have finished entering the **API Code**. You will notice that the API / UWI field will be filled in the New Log window.
- 6.) **Click** on the  **button** to activate the **Log Format List** window.

- 6.) **Click** on “V SYSTEM Geology Log [SYSTEM (I)]” to highlight it and then **click** on the  **button**. You may also **double click** on “V SYSTEM Geology Log [SYSTEM (I)].”
- 7.) Once you have been returned to the **New Log** window, **double click** in the **Log Start Depth** field. This will highlight the zero (0) and activate a flashing cursor. **Type 6000** in the **Log Start Depth** field.
- 8.) Once the information is entered, **click** on the  **button**.
- 9.) This will initiate a **New Log**. During this process, the curves associated with the selected log format will be added. **Drill Rate** will be the first Add curve window.


10.) Select min/2ft from the **Curve Units** drop down box. If done correctly it will look like Figure below.

11.) Click on the  button in the **Add Curve** window for **Drill Rate**. This will activate the second Add Curve window for **Total Gas** shown below.

12.) Click on the  button in the **Add Curve** window for **Total Gas**. This will activate well and it's log layout

- You have just added two curves to the database that will be displayed as curve layers in the Drilling Progress track on the new Tutorial log showing the Tutorial Wells information.

**** When the log opens, it should resemble this log.****

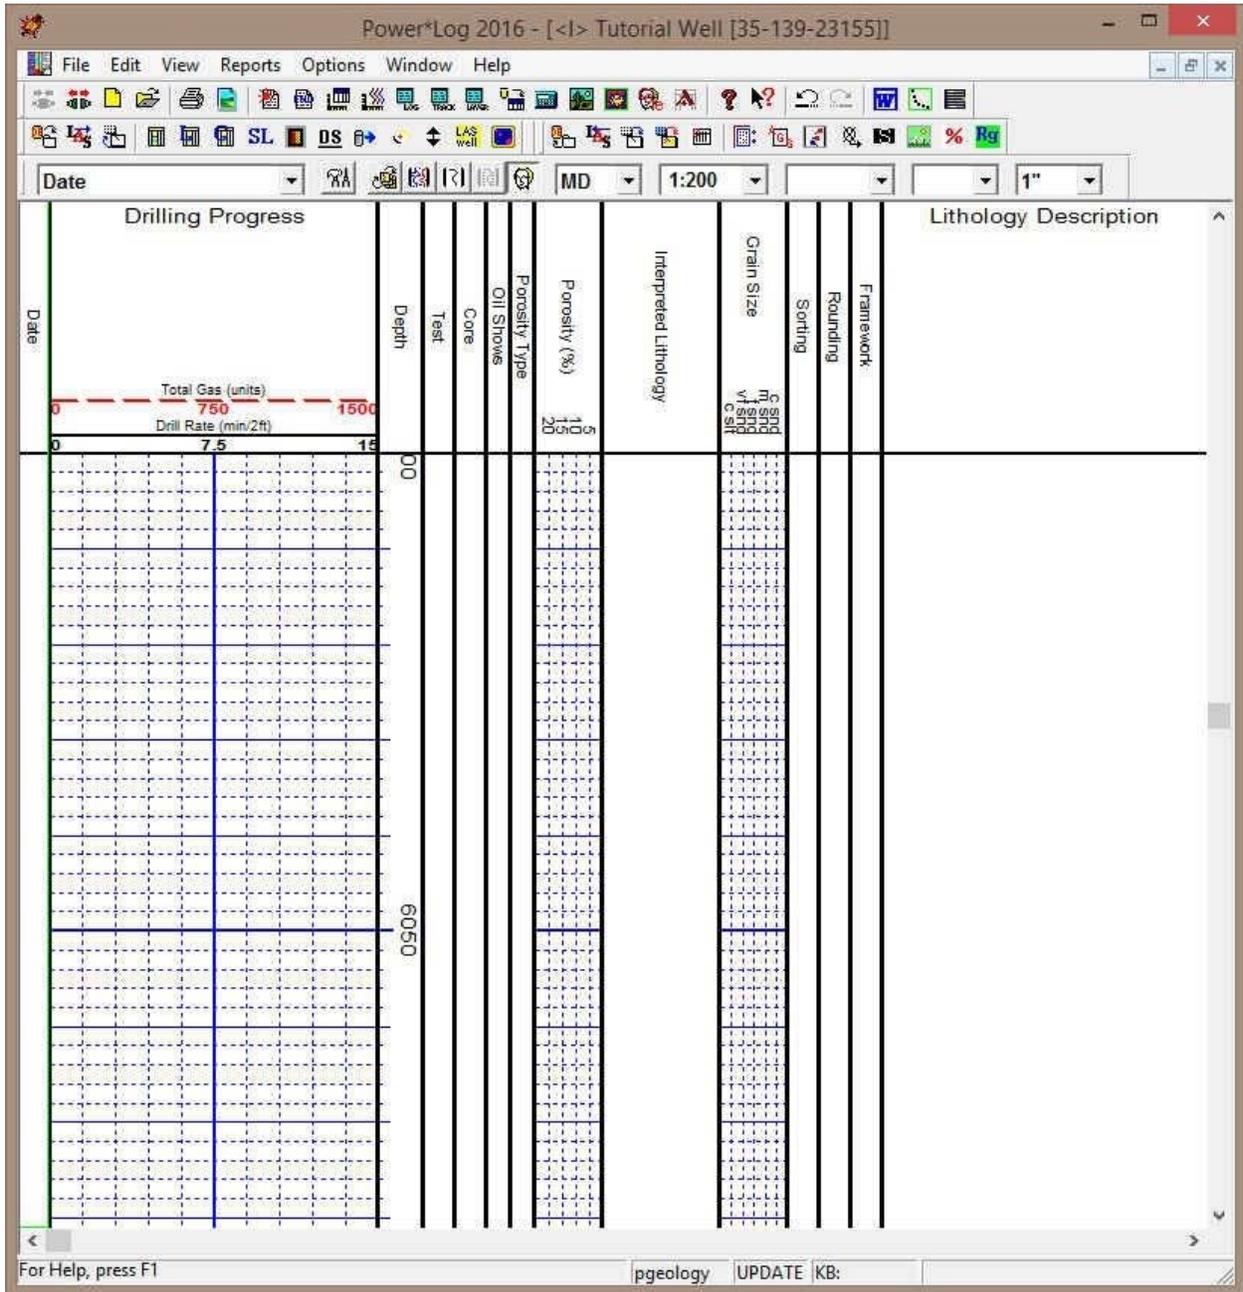

- 1.) You can now fill in your pertinent well information by selecting **Well** under **Edit** pull down menu on the **Selection Bar** to activate the **Well** window.

- 2.) Fill in the information you feel is necessary (The well window shown above has been filled in to give you an idea of how to complete the fields) and then **click** on the **Save** button to save any changes you have made to the database.


Note: Some of the fields in the **Edit Well** window have character restrictions or mandatory requirements. Consequently, if any of these restrictions have been violated or if any requirements have not been met, the offending field will be highlighted. The nature of the problem will be displayed on the **Status Bar** (lower left corner of the screen), and you will be prompted with a system error message window.

- 3.) If the record has been successfully saved, **click** on the **Exit** button, when prompted with the **Shortcut Options** system window.

The System Options Window


To activate the System Options window **click** on **System Options** under the **Options** menu selection.

General Tab

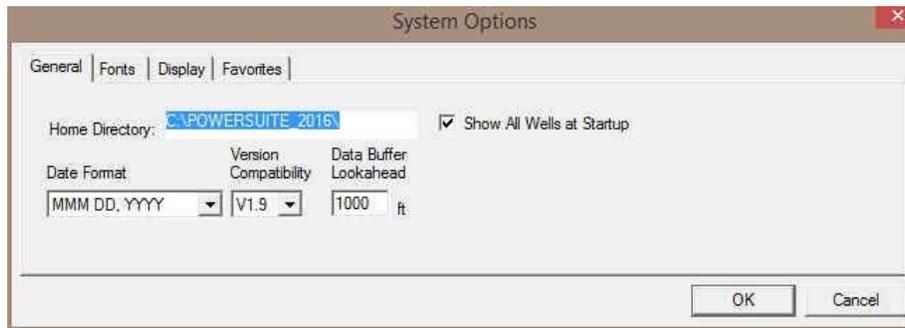

Home Directory - This is the directory on your hard drive where **Power*Log**, **Power*Core** and **Power*Curve** is being executed. The user will not see any symbols on their log or print out any of our reports if you have the wrong home directory.

Show All Wells at Startup This check box when activated will populate the Open Log window with all the wells in the database. If it is unchecked it may help our corporate users and the time it take to retrieve thousands of wells from the database and to populate the Open Log window with that information. If this check box is deactivated and you wish to see all your wells then simply **click** on the **Clear Query** button in the Open Log window to see all their wells if this option is deactivated.

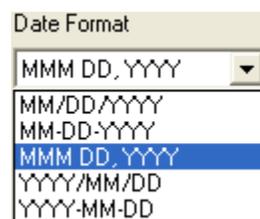


Date Format - From this drop box, you can select the date format. This selection determines how every date in **Power*Log / Core & Curve** will be entered and displayed. If you import a log with different date formats, **Power*Log / Core & Curve** will change the dates to comply with the format you've chosen here. The user can change this at any time and all the Date formats will be changed in the database.

Version Compatibility - Enables the user to achieve compatibility for Annotations in the older Versions of Power*Suite (V1.81 and before) and the Annotations in the newer Versions of Power*Suite (V1.9 and later).

Data Buffer Lookahead - The number placed in this field determines how far ahead and behind the current top depth will be stored in the computers buffer. The larger the look ahead number, the longer it takes for Power*Log / Core & Curve to refresh the screen when you exceed the look ahead value. However, until you meet or exceed the look ahead value, scrolling will be much faster, because the database is not yet being accessed.

Fonts Tab

This tab allows the user to set up most of the fonts used in Power*Log, Core and Curve. You can set it up to be used on the current log as well as using the fonts as your defaults when you are making new logs.

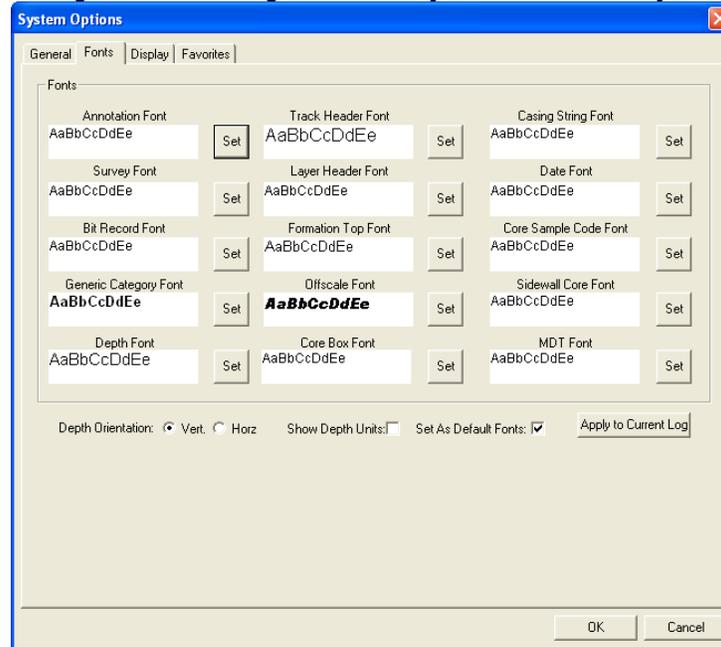

Annotation Font - Allows you to determine the default font style, type, color and size of your annotations on your log. Also this is the default when you use any of the Sample Description Transfer options.

Survey Font - Allows you to determine the font style, type, color and size of your survey data associated with the Survey Layer on your log.

Bit Record Font - Allows you to determine the font style, type, color and size of your bit record data associated with the Bit Record Layer on your log.

Generic Category Font - Allows you to determine the font style, type, color and size of your Long or Short Name display option in all the Generic Category Layers displayed on your log.

Depth Font - This allows you to determine the font style, type, color and size of the depth markers in the **Depth** track of the log.

Depth Orientation: Vert. Horiz - These radio buttons allows the user to change the orientation of the Depth Font on the Layer. Beware you may have to change the Track Width to accommodate the Font size and orientation. Refer to the Log Configuration Builder to do this.

Show Depth Units This check box when activated will display the depth units with the depth on the Depth Layer. ie. 1000 ft or 1000 m vs. 1000

Track Header Font - Allows you to determine the font style, type, color and size of your Track Headers on your log. All track headers use the same font across the entire log.

Layer Header Font - Allows you to determine the font style, type, color and size of your Layer Headers on your log. All Layer headers use the same font across the entire log.

Formation Tops Font - Allows you to determine the font style, type, color and size of your Formation Tops data associated with the Formation Tops Long and Expanded Layers on your log.

Offscale Font - Allows you to determine the font style, type, color and size of your curve values displayed when the curve pegs off scale.

Core Box Font - Allows you to determine the font style, type, color and size of your Core Box data entered in the Core Box layer.

Casing String Font - Allows you to determine the font style, type, color and size of your Casing string data displayed on the Casing String layer. This data is entered through the Casing String Report.


Date Font - Allows you to determine the font style, type, color and size of your Date data entered in the Date layer.

Core Sample Code Font - Allows you to determine the font style, type, color and size of your Core Plug data entered through the Core Plug Report. This font is displayed on the Core Sample Code layer.


Sidewall Core Font - Allows you to determine the font style, type, color and size of your Sidewall Run and Sample Number data entered through the Sidewall Core Report. This font is displayed on the Sidewall Core layer.

MDT Font - Allows you to determine the font style, type, color and size of your MDT Run and Test Number data entered through the MDT Report. This font is displayed on the MDT layer.

Set As Default Fonts This check box when activated will make the font setting in this window your defaults for any new log created regardless on the Fonts stored in the template.
Display Tab

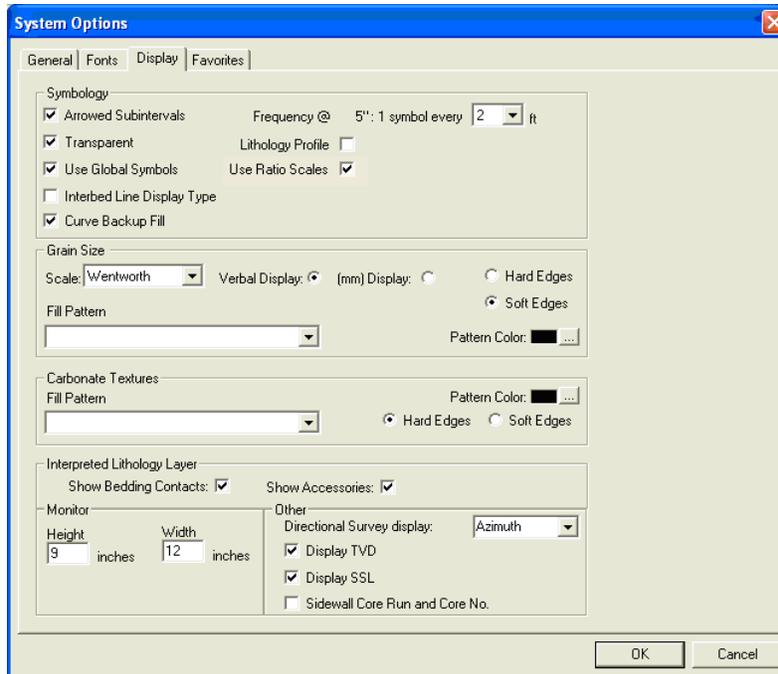

Arrowed Subintervals - This check box when activated will indicate the top and bottom of your subintervals (portion of an interval) with an arrow rather than a set of symbols. An example is shown below.

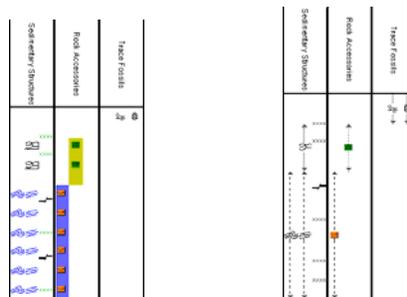

Normal Subintervals

Arrowed Subintervals

Transparent - This check box when activated, this function makes the background of the accessory symbols transparent, so that the bed in the background shows through. If deactivated, a white background surrounds the accessory symbols in order to separate them more from the beds.

Use Global Symbols – With the ability to edit existing metafiles the user may have imported a well that has used metafiles or symbols that have been modified to look differently than the one existing within your system symbols. If you wish to use your symbol set instead of the revised imported ones you can select this check box to make that change.

Interbed Line Display Type - This check box when activated will display the interbed data with a line display splitting the two lithology types or when unchecked will display the lithology in an interbed fashion as displayed below.




Curve Backup fill – This check box when activated will show a sideways hatching fill pattern when a curve goes off scale or in the backup mode. If unchecked there will be no hatching pattern when the curve goes off scale.

Frequency @ 1:240 – This drop box determines how often symbols are drawn on a **Lithology Layer**, with the scale of 1:240. For example: 1 symbol every 1 meter at 1:240, 2 symbols every 1 meter at 1:120, 1 symbol every 2 meters at 1:480, and so on. These frequencies are only in effect if you utilize the entire interval in **Oil Shows**, **Rounding**, **Sorting**, **Framework**, or designated an interval in **Sedimentary Structures**, **Traces Fossils** and Rock Accessories.

Lithology Profile - This check box when activated will fill in the Carbonate Texture and Grain Size layers with the interpretive lithology. It will draw the lithology to the maximum size filled in over the interval.


Note: The user may wish to turn off the track borders when this option is selected. You will see an example of this shown below.



Use Ratio Scales: This option allows the Imperial Users to utilize a ratio 1:200 or 1:500 rather than 2" or 5" which would be standard selections in the United States.

Grain Size Scale List box - You may choose between **Wentworth**, **Canstrat** or **Amstrat** scales, when using the **Grain Size Builder**. The Wentworth Grain size only allows full grain size while Canstrat / Amstrat allow half grain sizes when drafting in the Grain size and matrix layers.

Verbal Display: This radio button will display the **Grain Size Track header** with the equivalent verbal grain sizes such as C silt, VF snd, F snd, M snd, C snd etc.

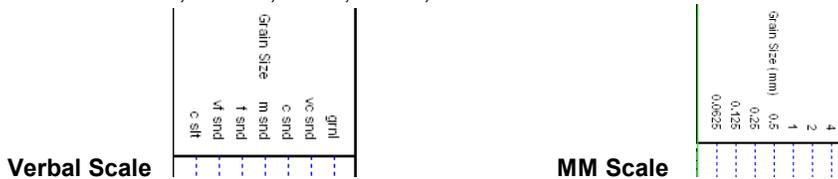

(mm) Display: This radio button will display the **Grain Size Track header** with the equivalent numeric grain sizes (in mm) such as .0625, .125, .25, .5, 1, 2 etc. as shown above.

Hard Edges This radio button will display the grain size with straight edges and right angles between the grain sizes. The illustration below is shown with Lithology Profile activated.



Soft Edges This radio button will display the grain size with curved edges and rounded angles between the grain sizes.

Grain Size Fill Pattern Upward hatch (left to right) at 45 degrees This drop box allows the user to select a hatching pattern when using the Grain Size Layer with the Lithology Profile not activate.

Grain Size Pattern Color: This color selector allows the user to pick the line color (foreground) when the fill pattern option is used. The background color is found in the Layer configuration for the Grain Size.



Carbonate Texture Fill Pattern This drop box allows the user to select a hatching pattern when using the Carbonate Texture Layer with the Lithology Profile not activate.

Carbonate Texture Pattern Color: This color selector allows the user to pick the line color (foreground) when the fill pattern option is used. The background color is found in the Layer configuration for the Carbonate Texture Layer.

Carbonate Textures Hard Edges This radio button will display the grain size with strait edges and right angles between the Carbonate Textures. The illustration below is shown with Lithology Profile activated.

Carbonate Textures Soft Edges This radio button will display the grain size with curved edges and rounded angles between the Carbonate Textures.

Interpreted Lithology Layer - Show Bedding Contacts: -When this check box is activated the bedding contacts (lines) between the drawn lithology types in the Interpretive Lithology Layer will be shown.

Interpreted Lithology Layer - Show Accessories: When this check box is activated it will turn on the accessories in the Interpretive Lithology Layer.

Monitor Height - This option allows you to scale your monitor for Power*Log / Core so you may correlate on-screen wells with hard copy logs that you may have. It is recommended that you take an opportunity to measure the vertical viewing area of your monitor in inches and then insert that value in the **Monitor Height** field. Be aware, however, that if you adjust the screen height knob on your monitor, this will affect the monitor height setting.

Monitor Width - This option allows you to scale your monitor for Power*Curve so you may correlate on-screen wells with hard copy logs that you may have. It is recommended that you take an opportunity to measure the horizontal viewing area of your monitor in inches and then insert that value in the **Monitor Width** field. Be aware, however, that if you adjust the screen width knob on your monitor, this will affect the monitor width setting.

Note: You must restart **Power*Log / Core & Curve** for the **Monitor Width / Height** changes to take effect.

Directional Survey display: This drop box option will display your directional surveys on your log in either Quadrant format N 62 ° W) or Azimuth format (AZ 298 °)

Sidewall Core Run and Core No. This check box when activated will display the Sidewall Core Run & Core numbers above the core triangle indicator on the Sidewall Core layer.

Favorites Tab

This tab allows the user to define their System favorites for all the data categories that support these choices. This tab dialogue also allows the user to access the % Lithology Sort order for the % Lithology Track.



Rock Favorites - The button when activated allows the user to determine the number of the activation of the Rock Type Builder window in the Interpreted and Detailed Lithology tracks.

- 1.) **Click** on the button in the **System Options** window.
- 2.) **Click** on the button in the Rock Type Favorites list window to prepare it for the selection of your Rock Favorites.
- 3.) **Select** the following **Rock Types** from the **Rock Type Favorites** list window:

Anhy (prim) [Anhydrite (primary)]
 Sh m gy [Shale medium gray]
 Ss [Sandstone]
 Plus any other rock types you would use a lot.

4.) Click on the  button to return to the **System Options** window.

Accessory Favorites - Allows the user to determine their favorite **Accessories** and then displays them in a pop-up menu generated by the activation of the **Accessory Builder** window in the **Interpretive Lithology** track.

1.) Click on the  button in the **System Options** window.

2.) Click on the  button in the **Accessory Favorites** list window to prepare it for the selection of your **Accessory Favorites**.

3.) Select the following **Accessories** from the **Thinbed**, **Components**, and **Cement** headings in the **Accessory Favorites** list window:

Thinbed

cht dk pebbles [chert dark pebbles]
 sh gy stringers [shale gray stringers]

Component

aren [arenaceous]
 fld grs [feldspar grains]
 pyric [pyritic]
 sac [salt casts]
 slty [silty]

Cement

sils [siliceous]
 Plus other components that you would use a lot.


4.) Click on the  button to return to the **System Options** window.

The Log Configuration Builder window

- This is the heart of the Log/Track/Layer configurations and controls the way your well's information is displayed on the log.
- The well may have a lot of information stored in the database, but that information cannot be shown graphically on the log until the necessary layers are built to illustrate that information.

1. Click on **Log Configuration Builder** under the **Options** menu on the **Selection Bar** or click on the **Log**

Configuration Builder  button on the **Toolbar** to activate window:

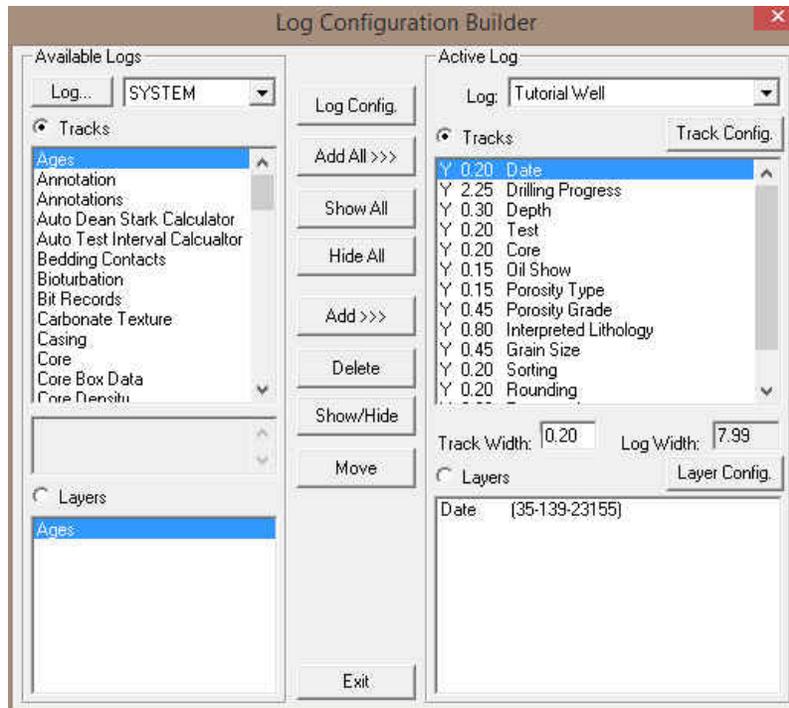

Fundamentals of the Log Configuration Builder Window

The left side of the Log Configuration Builder window: Available Logs

The **Available Logs** section or **left** side of the **Log Configuration Builder** window allows you to take any track or layer from **Available Logs** and add it to the log you are currently creating/building. On the **left** side of the window, below the **Tracks** radio button is a list of the tracks available for adding to the **Active Log**.

The **Available Logs** section or left side of the window contains the track and layer configuration of the **SYSTEM [SYSTEM]** log, when the window first opens. You have the option of using any of the existing **Tracks** and their associated layers or any of the existing **Layers** that are associated with any of the system logs in the log database.

The user can **click** on the **Log...** **SYSTEM** button on the left side of the screen to activate a selection list of all log formats that are in your database. The list is comprised of two (2) names with the first name in the list being the system **Log Name** and the second name (in brackets), being the **UWI** of its primary well. **Double click** on the log format you wish to copy from.

Below the **Layers** radio button, on the **left** side of the window, is a list of the layers available in the track highlighted above. They will be added all at once, if you add their parent track. However, they can also be added on an individual basis, if you only want to add one(1) layer to an existing **Active Log** track.

The right side of the Log Configuration Builder window: Active Log


The **Active Log** section or the **right** side of the window displays the track and layer configuration of the **Active Log** (the log you are currently creating), in the main **Power*Log** window. The name of the log is viewed in the **Log** field. In this case, it will be "**Tutorial Well**." Below the **Tracks** radio button on the **right** side of the window, is a list of the tracks that are currently found within the **Active Log**. The track at the top of this list is drawn on the left side of the log, while the track on the bottom of the list is drawn on the far right of the log with all of the other tracks drawn in between, respectively. Below the **Layers** radio button on the **right** side of the window, is a list of the layers that are associated with the track highlighted above.

The middle of the Log Configuration Builder window: Selection Buttons


The **selection** buttons, found in the middle column of the window, are for adding layers or tracks from the **Available Logs** to the **Active Log**, activating/deactivating the **Active Log's** tracks, deleting active log tracks or layers, and moving tracks or layers within the **Active Log** itself. Step-by-step instructions for accomplishing these tasks are provided on the following pages.

Working with the Log Configuration Builder Window**Deleting the Date and the Framework tracks on the Tutorial Log...**

- 1.) Highlight the **Date** track on the right side of the window by **clicking on it**.

- 2.) Click on the  **Delete** button. This action will prompt you with a system message, “*Do you want to delete the selected track in your log?*” Click on the  **Yes** button. The **Date** track has now been removed from the Tutorial Log.


- 3.) Highlight the **Framework** track by clicking on it once.

- 4.) Click on the  **Delete** button. This action will prompt you with a system message, “*Do you want to delete the selected track in your log?*” Click on the  **Yes** button. The **Framework** track has now been removed from the Tutorial Log.

Adding a Slide - Rotate Track to the Tutorial Log

- 1.) On the left side of the Log configuration window scroll down the list of tracks and **click on the Slide - Rotate** track. The track will become highlighted and the  **Tracks** radio button will become activated.
- 2.) On the right side of the Log configuration window **click on the Depth Track**. The track will become highlighted and the  **Tracks** radio button will become activated.

- 3.) In the middle of the Log configuration window **click on the**  **Add >>>** button. This will activate a System Message asking the user “Do you really want to ADD the selected (track) from the available log to the active log?”

- 4.) Click on the  **Yes** button. This will activate a Get Name window asking the user to name the track.

- 5.) The user may change the name or accept the Slide - Rotate as a name by **clicking on the**  **OK** button and the track will be added above the Depth Track or to the left on the vertical log.


Resizing a track...

- 1.) Scroll down the tracks list, on the **right** side of the **Log Configuration Builder** window and **click on the Lithology Description** track.
- 2.) **Double click** in the **Track Width** field and **Type** in the value of **2.5** Then, **press the Tab** key and the total width of the log itself will change to reflect the increase in the width of the **Lithology Description** track as well as the Log width field.

Note: For paper 8.5” wide, 8.00” is the widest that you want your log to be, especially if you are printing out the log in the **Portrait** paper orientation.

Moving the Oil Show track...



- 1.) Scroll down the tracks list, on the **right** side of the **Log Configuration Builder** window, and **click on the Oil Show** track to highlight it.

- 2.) Click on the  **Move** button and it will change to “ **Move Start**.” Then, **click on the Lithology Description** track. The **Oil Show** track will then be placed above the **Lithology Description** track (to the left of the **Lithology Description** track on the actual log).

Deleting the Gas Annotations layer from the Drilling Progress track...

- 1.) Scroll up through the tracks list, on the **right** side of the **Log Configuration Builder** window, and **click on the Drilling Progress** track to highlight it. Notice that the layers associated with this track are displayed below, in the **Layers** list box.

- 2.) Highlight the **Gas Annotations** layer, in the **Layers** list box, by clicking on it once. Notice that the  **Layers** radio button is automatically activated by highlighting a given layer.

- 3.) Click on the  button. This action will prompt you with a system message, “**Do you want to delete the selected layer in your log?**” Click on the  button. The **Bit Record** layer has now been removed from the log

Turning off a track...


- 1.) Scroll down the tracks list, on the **right** side of the **Log Configuration Builder** window, and **click** on the **Test** track.
- 2.) Click on the  button to turn the “**Y**”(yes), to the left of the track name, to “**N**”(no), indicating that the track will **not** be shown on the log, until it is reactivated.
- 3.) Alternatively, you can simply **double click** on the **Test track** to turn the “**Y**”(yes) to “**N**”(no). The user will notice the log width has now decrease in size from 8” to 7.8” wide.

Resizing and Configuring the Drilling Progress Track

- 1.) Scroll up the tracks list, on the right side of the Log Configuration Builder window, and then highlight or **click** on the **Drilling Progress Track**.
- 2.) **Double click** in the **Track Width** field and **Type** in the value of **2.45**. Then, **press** the **Tab** key and the total width of the log itself will change to reflect the increase in the width of the **Drilling Progress Track** as well as increase the Log width field to 8”.
- 3.) Then, **click** on the  button (to the right of tracks), to activate the Track Configuration window. The changes in step four have already been done in this example.



The screenshot shows the 'Track Configuration' dialog box. At the top, there are buttons for 'Save', 'Undo', 'New', 'Del', 'First', 'Prev', '?', 'Next', and 'Last'. The 'Name' field is highlighted in yellow and contains 'Drilling Progress'. The 'Sequence' field is '2' and the 'Width' field is '2.45'. Below these are 'Foreground Color' and 'Background Color' dropdowns, and a 'Depth Offset' field. The 'Current Layer...' dropdown is set to 'Drill Rate'. The 'Remarks' field is empty. The 'Heading' section has three fields: 'Drilling Rate', 'Tutorial Well', and '35-139-231155'. On the right, there is a 'Borders' section with three checked checkboxes: 'Left / Bottom', 'Right / Top', and 'Header Border'.


- 4.) Currently, the name of the track is **Drilling Progress**. To change the track name, **Type** “**Drilling Rate**” in the **Name** field. Then, change the **Heading** name by typing “**Drilling Rate**” into the first **Heading** field. In the second heading field, **Type** in the well name “**Tutorial Well.**” In the third heading field, **Type** in the location for the Tutorial Well, “**35-139-231155.**” This would be beneficial if you were faxing or printing to Adobe the log only. It would identify to the client the location of the well data that is being transmitted.
- 5.) **Click** on the  button to save your changes
- 6.) A system message will appear asking the User. “Record saved successfully. Do you wish to exit?” **Click** on the  button. This action will return you to the **Log Configuration Builder** window, where you will see the new name of your track displayed on the log you are creating. Later, when you exit from the **Log Configuration Builder** window, you will notice that the track headings have conformed to your changes.
- 7.) **Press** the **Esc** key on the keyboard or **click** on the  button to exit from the **Log Configuration Builder** window. You will be returned to the main log window, where you will see the changes you have made to the new log.

Importing ASCII File Data into the Drill Rate & Total Gas curve layers:


You will be able to do this import only if you have the LAS / ASCII Import Utility.

1.) Click on the **File** pull down menu, **select Import / Export** and then **select ASCII Import** from the pop out


menu. OR the user can **select the**  **Icon** from the Import Tool Bar. This will activate an Open ASCII Data File window.

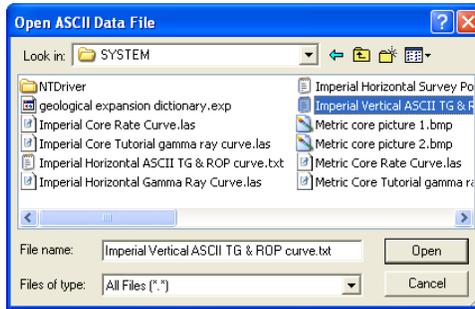

2.) Navigate to the **C:\Powersuite_2015\system** folder and **select the Imperial Vertical ASCII TG & ROP curve.txt** file. Click on the  **Open** button. Once the file has been selected the Set delimiter window will be activated.

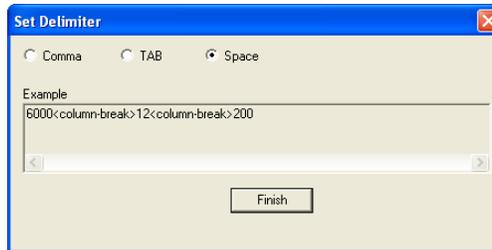

3.) This file is a Space delimited file and the default on this window is space delimited. You will see <column break> between the data points. Click on the  **Finish** button. This will open the Import window.

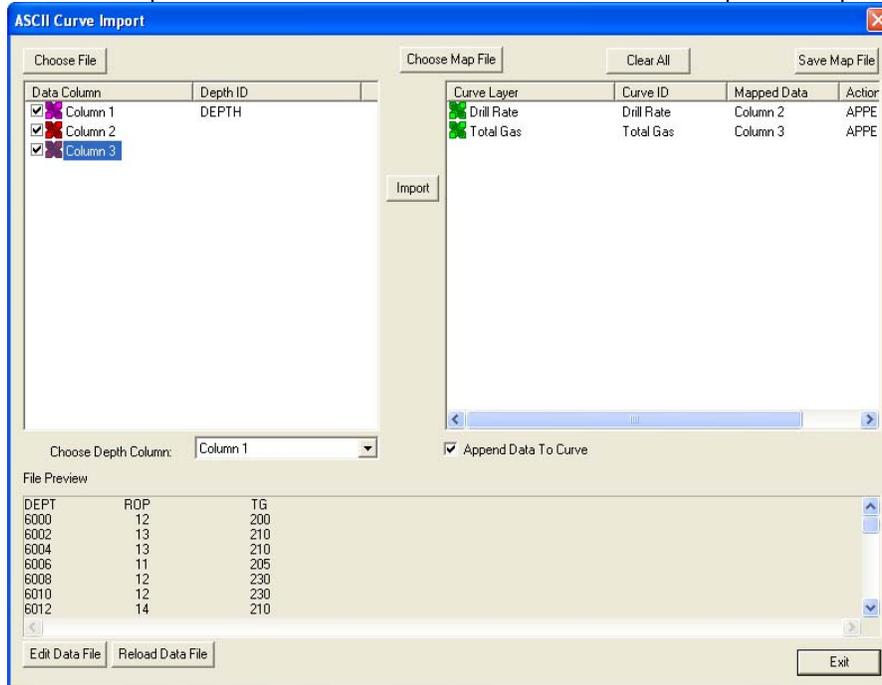

4.) The default on the Depth column is Column 1 which is indicated by the purple X. **In our case the depth is the first column so we do not have to change the depth column indicator.**

5.) **Click on the Column 2** on the left side and **drag it to the Total Gas Curve layer** on the right side of the window. You will see Column 2 in the mapped Data field and an APPEND in the action field.


- 6.) Click on the **Column 3** on the left side and **drag it to the Drill Rate Curve layer** on the right side of the window. You will see Column 3 in the mapped Data field and an APPEND in the action field.
- 7.) Click on the **Import** Button. This will import the curve data and prompt you with a database message saying Imported successfully.



- 8.) Click on the **OK** button to close the window.
- 9.) Click on the **Exit** button to close the ASCII Import window.

Changing Curve Scales

- 1.) Click anywhere in the **Drilling progress track** to make it active. It will have a green outline. Go to the **layer selection list** and select **drill rate layer** from the list to make it the active layer.
- 2.) **Right click** anywhere within the **Drilling Rate** track (Drill Rate Layer) to activate the pop-up menu.
- 3.) **Select Scale** from the pop-up menu to activate the **Curve Scale** window for the **Drill Rate** curve. In this figure the user will notice the Scale has already been changed.

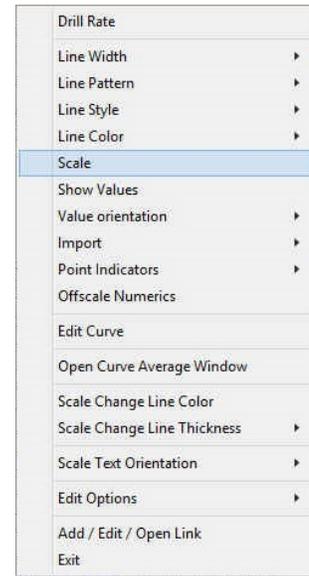


- 4.) Notice that the default scale (when the curve was originally added to the log), was **0 to 15 min/m**, as you would see in your window. To change the original scale from **0 – 15 min/2ft** to **0 – 30 min/2ft** , simply adjust the **Right / Top Scale** value to **30** by **double clicking** in the **Right Scale** field and typing in a value of **30**.

Note: The backup scale (in this case **straight shift**), is there in case the curve values go off-scale (more than **30 min/2ft**). A **straight shift** backup scale for an original scale of **0 to 30min/ 2ft** would be **30 to 60 min/2ft** for **Left** and **Right Scale** values, respectively.


- 5.) Click on the **Save** button and select **Exit** from the ensuing **Shortcut Options** window.

****Your log should now look like the log shown below****

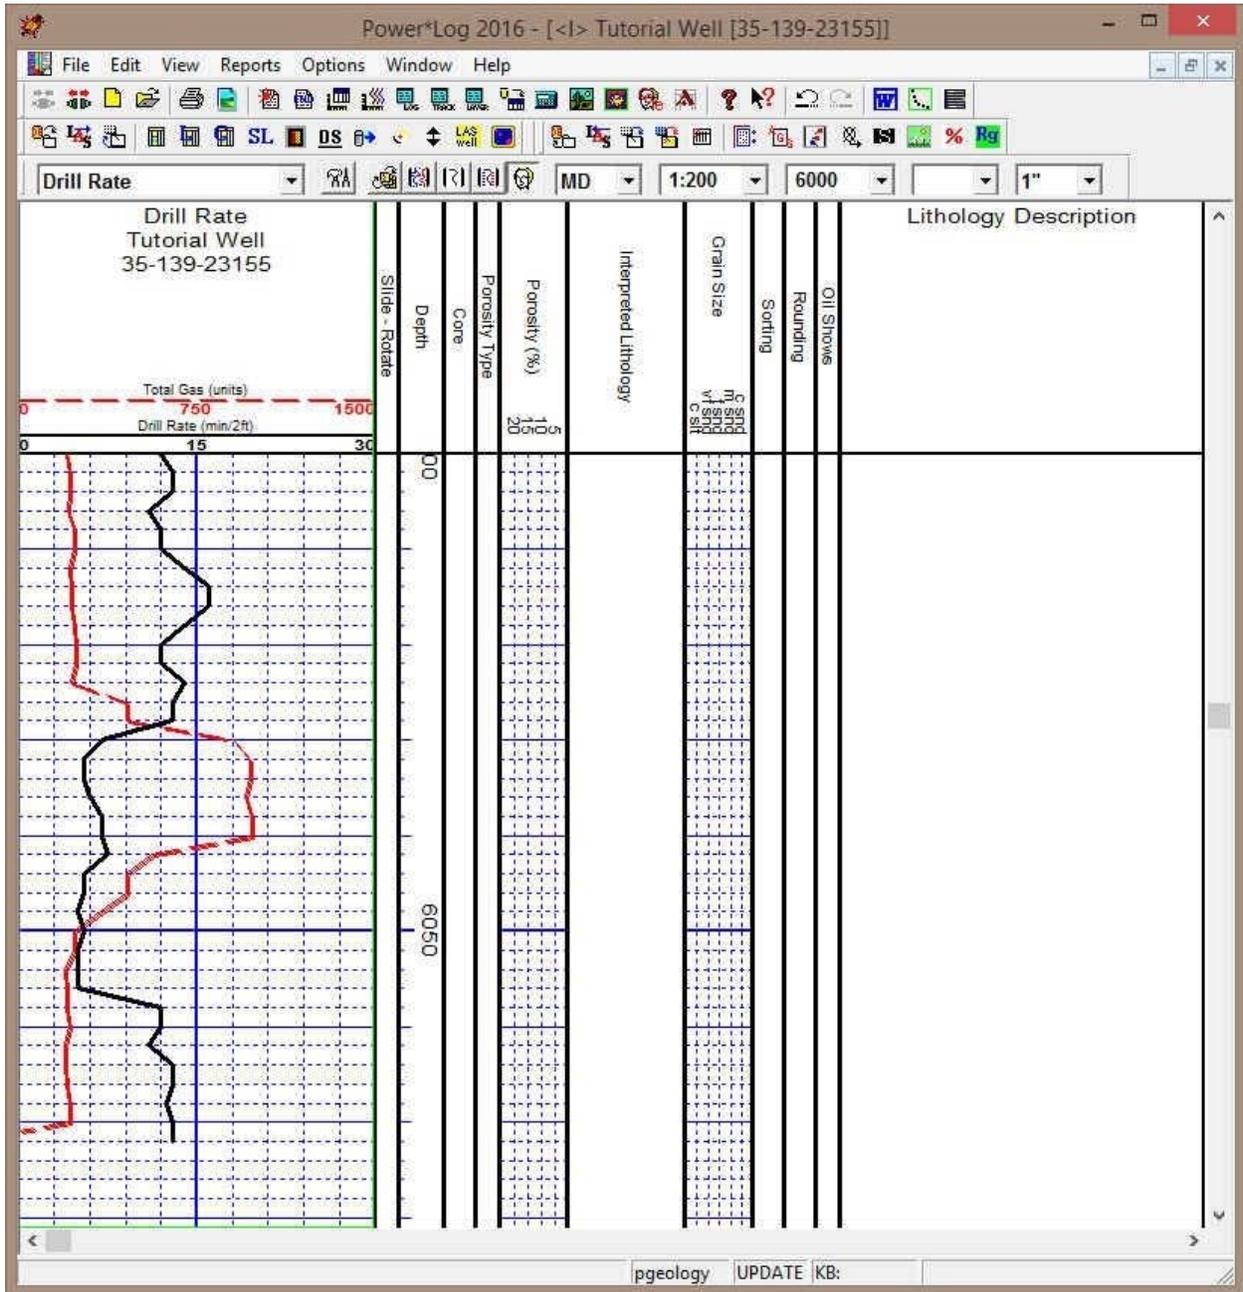

Adding Sample Descriptions

- 1.) Click on **Sample Description**, under **Reports** on the **Power*Log™ Selection Bar** to open the **Sample Description** window.

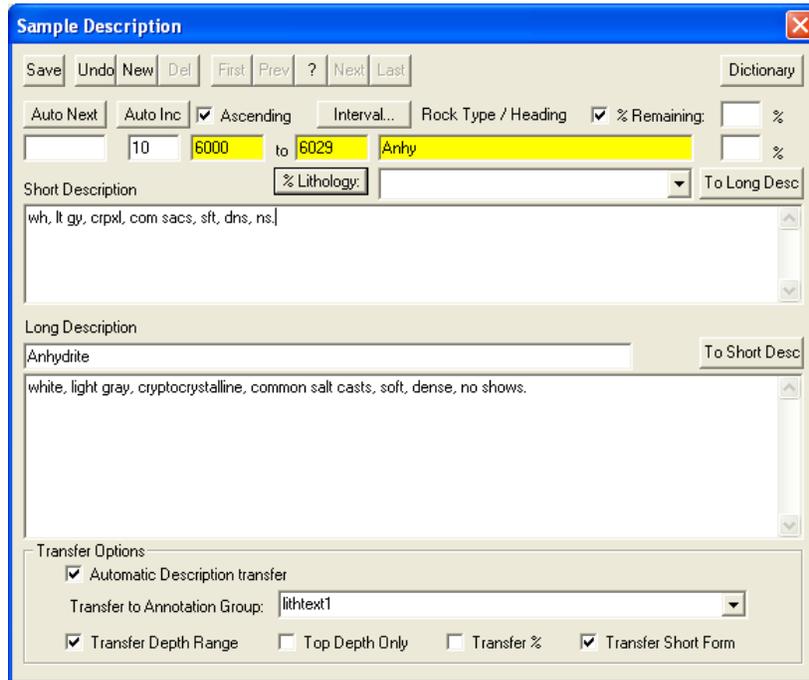

- 2.) Type **6000** into the **Interval (From)** field and then **press the Tab key**
- 3.) Type **6029** into the **Interval (To)** field and then **press the Tab key**
- 4.) Type **Anhy** into the **Rock Type / Heading** field and then **press the Tab key 4 times** to get to the short description field.

Note: The rock types have to be typed in correctly in the Short form field (according to our Geological Expansion Dictionary) in order for the Rock Type to be filled in when the **Enter key** is depressed.

- 5.) Type the following description into the **Short Description** field, exactly as it appears below:

wh, lt gy, crpxl, com sacs, sft, dns, ns.

Note: The **Short or Long Descriptions** can be transferred to the **Lithology Description** layer and only the **Long Description** will be printed out in the **Sample Description**.

- 6.) Select the **Automatic Transfer**, **Transfer Depth Range** and **Transfer Short Form** check boxes (), as shown in the preceding sample description window.
- 7.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window. You will see your sample description on the log at 6000 ft with the options selected in step 6.

• **Adding another Sample Description to the same interval...**

- 1.) Type **Sh** into the **Rock Type** field, **tab 4 times** and Type the following description into the **Short Description** field:

lt gy, wxy, bentic, occlly slty, tr aren grs, sft, blk.

- 2.) Deselect **Transfer Depth Range** check box ().
- 3.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window. Your description will now be viewed at 6002 ft.

Note: If you have made any typing errors the user can click on the **Cancel** button, then you can make any necessary corrections and then **Save** the record once again to replace the old record with the new one.

- Adding another Sample Description to a new interval...

- 1.) Click on the **Auto Next** button to advance the description interval **from depth to 6029**. **Type** in a new depth to **6041**.
- 2.) **Type Ss** into the **Rock Type** field, **tab 4 times** and then **Type** the following description into the **Short Description** field:
wh, lt gy, vf - f gred, w srt, sbang, qtz, tr wthrd fld grs, sils cmt, p intgran por (3-7%), sl tr ptch brn o stng, dull yel flor, fr stmg mky yel cut flor.
- 3.) **Select Transfer Depth Range** check box ().
- 4.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window. You will see your description at 6029 ft.

Sample Description

Save Undo New Del First Prev ? Next Last Dictionary

Auto Next Auto Inc Ascending Interval... Rock Type / Heading % Remaining: 100 %

6029.00 10 6029.00 to 6041 Ss %

Short Description % Lithology: To Long Desc

wh, lt gy, vf - f gred, w srt, sbang, qtz, tr wthrd fld grs, sils cmt, p intgran por (3-7%), sl tr ptch brn o stng, dull yel flor, fr stmg mky yel cut flor.

Long Description To Short Desc

Sandstone

white, light gray, very fine to fine grained, well sorted, subangular, quartz, trace weathered feldspar grains, siliceous cement, poor intergranular porosity (3-7%), slight trace patchy brown oil staining, dull yellow fluorescence, fair streaming milky yellow cut fluorescence.

Transfer Options

Automatic Description transfer

Transfer to Annotation Group: lithtext1

Transfer Depth Range Top Depth Only Transfer % Transfer Short Form

- Adding more Sample Descriptions to a new interval...


- 1.) Click on the **Auto Next** button to advance the description interval **from depth to 6041**. **Type** in a new depth to **6056**.
- 2.) **Type Ss** into the **Rock Type** field, **tab 4 times** and then **Type** the following description into the **Short Description** field:
wh, lt gy, vf - m gred, modly w srt, sbang, qtz, tr wthrd fld grs, tr dk cht pbls, sils cmt, fr intgran por (6-10%), q brn o stng, no cut flor.
- 3.) **Deselect the Transfer Depth Range** check box ().
- 4.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window. You will see your description at 6041 ft.

- Adding our Last Sample Descriptions utilizing the Auto Next button...


- 1.) Click on the **Auto Next** button to advance the description interval **from depth to 6056**. **Type** in a new depth to **6070**

- 2.) Type **Sh** into the **Rock Type** field, **tab 4 times** and then **Type** the following description into the **Short Description** field:
m - dk gy, micmica, v carb, calcs, fis.
- 3.) **Deselect** the **Transfer Short Form** check box ().
- 4.) **Click** on the **Save** button and then **select** **Exit** from the ensuing **Shortcut Options** window. You will see your description at 6056 ft.

Printing out Sample Descriptions to Word. (Only if you have Word for Windows)

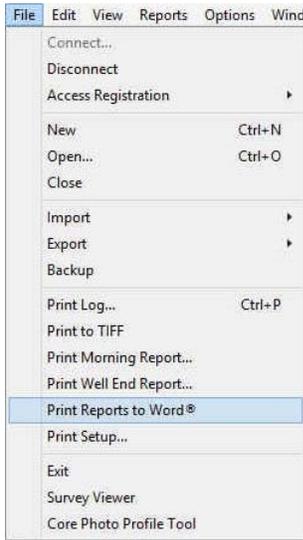

- 1.) Click on the **Print Reports to Word** button on the **Toolbar** or **select Print Reports to Word Selection**, under the **File menu**, on the **Selection Bar** to activate the **Power*Log Report: Well End Report** window.
- 2.) The **Reporting Tool** print window will automatically default to the active **Well/Log Name**.: You will see **Tutorial Well** in the **Choose a Well** field If it is not the defaulted well then go to the **Well list** drop box and select it from the List.

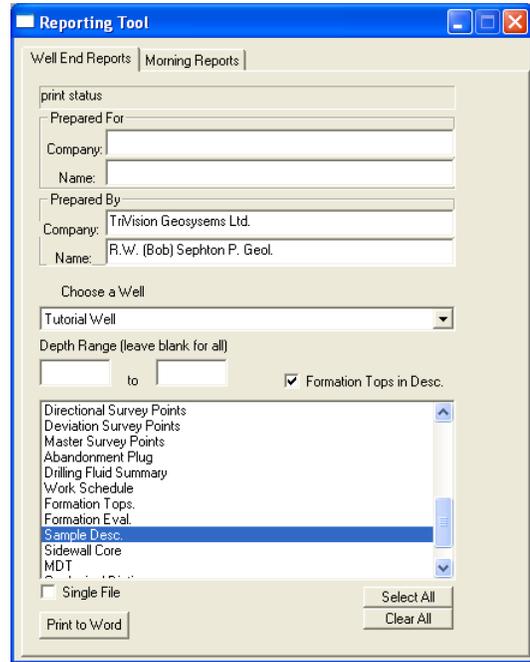

- 3.) Highlight **Sample Desc** in the **Reports** field by clicking on it once.
- 4.) Leave the **Depth Range** field blank to print all the descriptions.
- 5.) **Click** on the **Formation Tops in Desc.** check box
- 7.) **Click** on the **Print to Word** button in the **Well End Report** window to printout the **Sample Descriptions**. This will activate you word program and you will get the Sample descriptions and Formation tops that were input through the Reports window.
- 8.) When you are finished, **press** the **Esc** key on the keyboard to exit from the **Well End Report** window and to

activate the following system message, "**Do you want to save the setup**" Clicking on the **Yes** button and the window selections you have just made will be remembered for the next time. Clicking on the **No** button will remember the default selections that were set for this window.

Printing out Sample Descriptions (If you do not have Word for Windows)

- 1.) Click on the **Print Well End Report** button on the **Toolbar** or **select Print Well End Report**, under **File**, on the **Selection Bar** to activate the **Power*Log Report: Well End Report** window.
- 2.) The **Well End Report** print window will automatically default to the active **Well/Log Name** and its associated **API**: you will see **Tutorial Well (35-139-23155)** in the **Well List** field and it should be highlighted. If it is not highlighted, move the mouse pointer to the **Well List** field and **click** on the desired **Well / Log Name** to highlight the **Well** you wish to print information from.
- 3.) Highlight **Sample Descriptions** in the **Reports** field by clicking on it once.
- 4.) **Select Printer** from the **Output** drop box field list.

- 5.) Click on the **Printer Setup...** button, in the upper right corner of the **Well End Report** window, to activate the **Print Setup** window. Notice that the currently selected printer is listed beneath the **Default printer** radio button () at the top left of the **Print Setup** window. Use the **Printer** section of the **Print Setup** window to specify the use of a printer other than the default printer.

Note: Power*Log™ automatically defaults to a **Paper Orientation** of **Portrait** and a **Paper Size** of **8 5 x 11**, as specified in the **Orientation** and **Paper** sections, respectively, of the **Print Setup** window. Please do **NOT** change these default settings.

- 6.) Make sure that the **All** check box () in the **Sample Description** section at the lower right of the **Well End Report** window, is activated.

- 9.) Click on the **Print** button in the **Well End Report** window to printout the **Sample Descriptions**.

- 10.) When you are finished, **press** the **Esc** key on the keyboard to exit from the **Well End Report** window and to activate the following system message, "**Do you want to save the setup configuration?**" Click on the

Yes button and all of the printer selection/settings information utilized in the **Well End Report**


window will be saved to the database for any future **Well End Report** print jobs. Clicking on the **Yes** button will also return you to the main log window.

Drawing Interpreted Lithology

Note: To work on any layer in any track, simply **double click** on the track in which you wish to work to activate the "**builder**" window for that particular layer. Once the "**builder**" window for a given layer is active, you are then able to access the **pop-up** menu [**right click**] associated with that "**builder**" window and may proceed to enter any necessary intervals and graphical descriptions for the given layer.

- **Drawing Rock Types...**

- 1.) **Double click** anywhere within the **Interpreted Lithology** track to activate the **Rock Type Builder** window and the Toolbox with your Favorites Rock Type List.

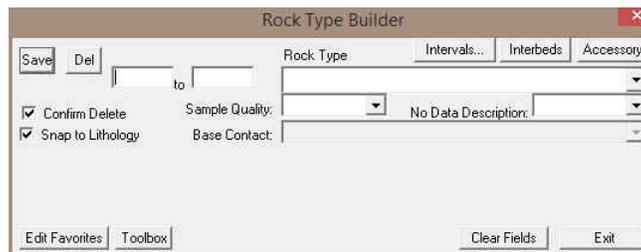

- 2.) The user can move the Tool Box to a position where it is out of the way by clicking and dragging the Tool Box menu bar.

Note: The graphical images utilized in the Tool Box window represent specific **Rock Types** selected by the user in the **System Options, Favorites Tab** window (See **System Options** earlier in this tutorial). The written descriptions of the **Rock Types** illustrated in the above diagram were included as a visual aid and do not normally accompany a pop-up menu.

- 3.) **Select** the **Rock Type** for **Anhydrite (primary)** from the Tool Box window and it will automatically be displayed in the **Rock Type** field within the **Rock Type Builder** window.
- 4.) Define the top interval by **clicking and holding** the **left** mouse button at **6000'** on the **Interpreted Lithology** track.
- 5.) Define the bottom interval by **dragging** the mouse pointer to **6029'** on the **Interpreted Lithology** track.
- 6.) **Release** the **mouse button** and the interval will be drawn accordingly.

- **Drawing another Rock Type...**

- 1.) **Select** the **Rock Type** for **Sandstone** from Tool Box window and it will automatically be displayed in the **Rock Type** field within the **Rock Type Builder** window.
- 2.) Define the top interval by **clicking and holding** the **left** mouse button at **6029'** on the **Interpreted Lithology** track.

6029'
6058'

- 3.) Define the bottom interval by **dragging** the mouse pointer to **6058'** on the **Interpreted Lithology** track.
- 4.) Release the mouse button and the interval will be drawn accordingly.

And another...

- 1.) **Select** the **Rock Type** for **Shale (medium gray)** from the Tool Box window and it will automatically be displayed in the **Rock Type** field within the **Rock Type Builder** window.
- 2.) Define the top interval by **clicking and holding** the **left** mouse button at **6058'** on the **Interpreted Lithology** track.

6058'
6070'

- 3.) Define the bottom interval by **dragging** the mouse pointer to **6070'** on the **Interpreted Lithology** track.
- 4.) Release the mouse button and the interval will be drawn accordingly.

Note: You may wish to resize a particular bed or lithologic interval, but remember that beds cannot completely overlap one another. Also, keep in mind that only the top or the bottom of a particular bed can be resized at any one time. Accordingly, if you wish to resize both, you will have to do it twice.

- **Resizing an interval...**

N.B. If you have the **Snap to Lithology** checked and your mouse pointer accuracy is 1 you must uncheck the check box to resize the following bed or decrease the mouse pointer accuracy.


- 1.) **Press and hold** the **Ctrl** key on the keyboard **down**, while hovering over the bed boundary between the Shale and Sandstone bedding contact at **6058 ft**. You will view a mouse pointer turn into resize arrow  and if the shale is viewed in the builder **click and drag** the **left** mouse button up two feet to **6056 ft** on the **Interpreted Lithology** track.
- 2.) Release the mouse button at **6056 ft**, followed by the release of the **Ctrl** key on the keyboard, and you will be prompted with the following system message, "**Do you really want to resize the interval from 6058.00 – 6070.00 to 6056.00 - 6070.00?**"
- 3.) **Click** on the **button**.
- 4.) **Press** the **Esc** key on the keyboard to exit from the **Rock Type Builder** window and return to the log.

Deleting a Single Rock Type or Bed

1. **Right click** anywhere within the **Interpreted Lithology** track to activate the pop-up menu.
2. **Click** on **Delete** and the following system message will be activated, "**Do you really want to DELETE _ to _ ?**"
Click on the **button** to confirm the deletion.
3. Press the **Esc** key on the keyboard to exit from the **Rock Type Builder** window.

Deleting Multiple Rock Types or Beds

1. **Hold** the **SHIFT** Key **down** and then **click and drag** anywhere within the **Interpreted Lithology** track and **then let go** of the **Shift** Key and **left** mouse **button**. This will activate a **Delete Intervals** message box.

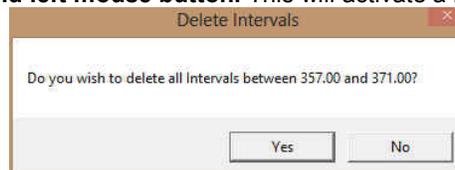


2. **Click** on **button** and the Intervals dragged over will be deleted.

Note: When you delete a **Rock Type**, you will also delete its associated bed restricted rock description information, i.e. **Grain Size, Porosity Grade, Type, Oil Show** and all other bed restricted data.

3. Press the **Esc** key on the keyboard to exit from the **Rock Type Builder** window.

****Your log should now look like the log shown below.****

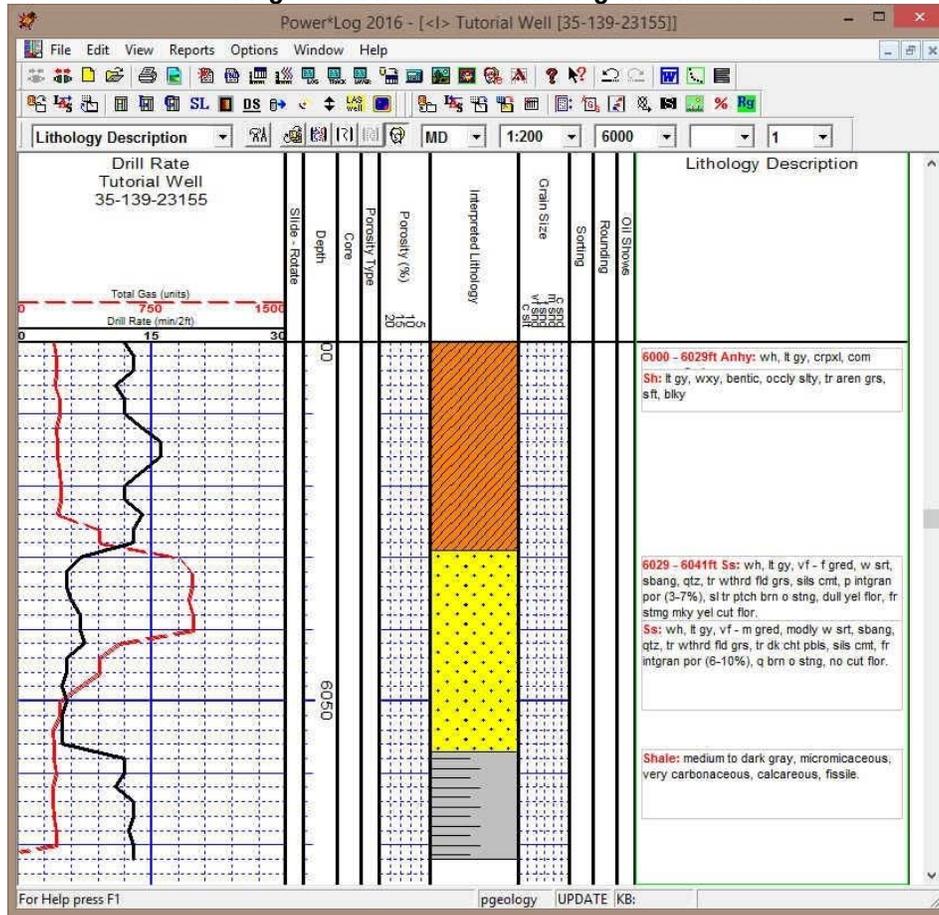


Editing Lithology Descriptions

In these examples we will start from the lower descriptions and work our way up the transferred descriptions. We will demonstrate to the user how to change the position, delete and modify transferred sample descriptions.

- 1.) Make the **Lithology Description** layer active (in the **Layer Selection List** field), by **clicking once** anywhere within the **Lithology Description** track to highlight the **Lithology Description** track in **green**.


Overview of RTF Font Toolbar buttons.

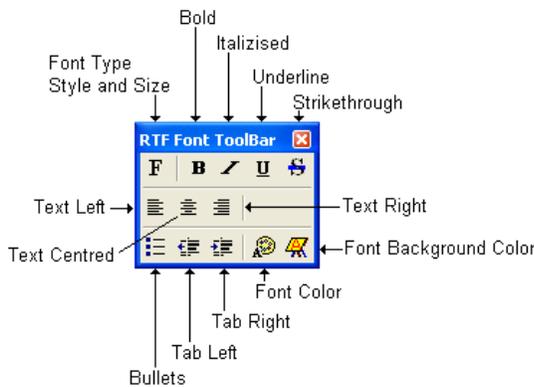


F At the flashing cursor or with some text highlighted this button will activate a Font Dialogue window to change Font Type, style, size etc.

-  At the flashing cursor or with some text highlighted this button will activate a Bold Font style.
-  At the flashing cursor or with some text highlighted this button will activate an Italic Font style.
-  At the flashing cursor or with some text highlighted this button will activate an Underline Font style.
-  At the flashing cursor or with some text highlighted this button will activate an Strikethrough Font style.
-  At the flashing cursor or with some text highlighted these buttons will orient the text line or paragraph left, centered or right within the box outline.
-  At the flashing cursor or with some text highlighted this button will place a bullet at the start of the text line or paragraph.
-  At the flashing cursor or with some text highlighted these buttons will indent or tab the text line or paragraph either left or right.
-  At the flashing cursor or with some text highlighted this button will activate a new Font color.
-  At the flashing cursor or with some text highlighted this button will activate a Font background color.

Overview of RTF Lines and Boxes Toolbar buttons.

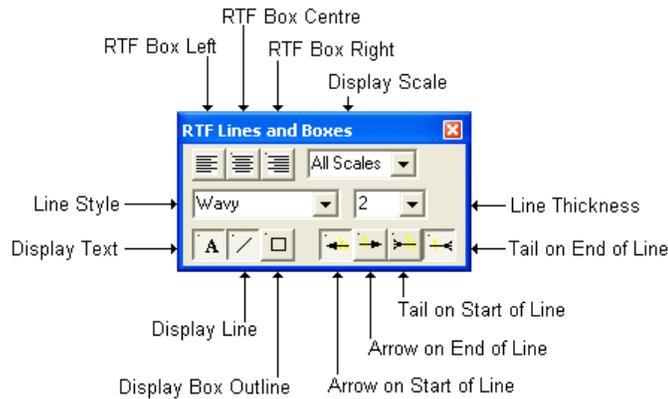

 **Left Right Centered Text boxes:** With the text box or annotations outline activated these buttons will orient the text box left, centered or right within the track borders. The user can also click and drag on the box outline to any orientation on the track which will override these buttons.

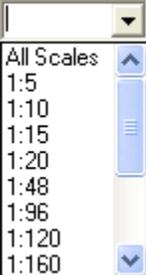 **Display scale drop box:** This allows the user to change the display scale for each annotation to adapt to the printed or viewing scale of the log. The All Scales selection will display the annotation at all viewing and printing scales from 1:1 to 1:5000. If you select a different display scale then the annotation will be viewed at that viewing and printing scale and smaller. Anything larger than the display scale and the annotation will not be viewed or printed. This should alleviate the annotations overlapping each other when printed out on different scales. For example if the user were to choose 1:120 the annotation would show up on viewing / printing scales from 1:120 to 1:5 and not show up on scales from 1:121 to 1:5000.

 **Line Style Selector and Line Thickness drop boxes:** These drop boxes allow the user to select a different line style for their drawn line as well as the line thickness for the line that is associated with each individual annotation. You can only have one line per annotation. The line can only be redrawn and not moved.

 This button will show / hide the text for a particular annotation. The text will not hide itself until the annotation is clicked outside of or deselected.

 This button will show / hide the line for a particular annotation.



This button will show / hide an outline around the annotation. The grey box you see around all annotations will not be printed. Only when this button is activated will the box be printed.



Will show / hide an arrow pointer at the end of a line draw.



Will show / hide an arrow pointer at the start of a line draw.



Will show / hide an tail at the end of a line draw.



Will show / hide an tail at the start of a line draw.


Moving a Lithology Description:

- 1.) Click anywhere within the **Shale description that is viewed on your log at 6060 ft** to activate the **RTF Font and RTF Line and Boxes toolbars** and highlight the text.
- 2.) Move the mouse pointer to the outline and you will see the pointer turn into a  **crosshair**. Click and drag your mouse to move the description down 4 feet to **6064 ft**.
- 3.) Click outside the annotation to save your annotations.

Editing Sample Descriptions


- 1.) Now we will edit the Shale description at 6001 ft. Click in the **Sh description at 6001 ft**. You will see the description outlined on the log.
- 2.) Move the mouse pointer to the outline and you will see the pointer turn into a  **crosshair**. Click and drag your mouse to move the description down 11 feet to **6012 ft**.
- 3.) Move your mouse pointer in the text field and click between the **Sh** and the **(:)** colon and **Type in Lams**.
- 4.) Click outside the annotation to save your annotations.
- 5.) Move the other annotations so that fit on the layer without overlapping each other and then **Click outside the highlighted annotation** to save your changes. Follow the example below.

****Your log should now look like the log below.****

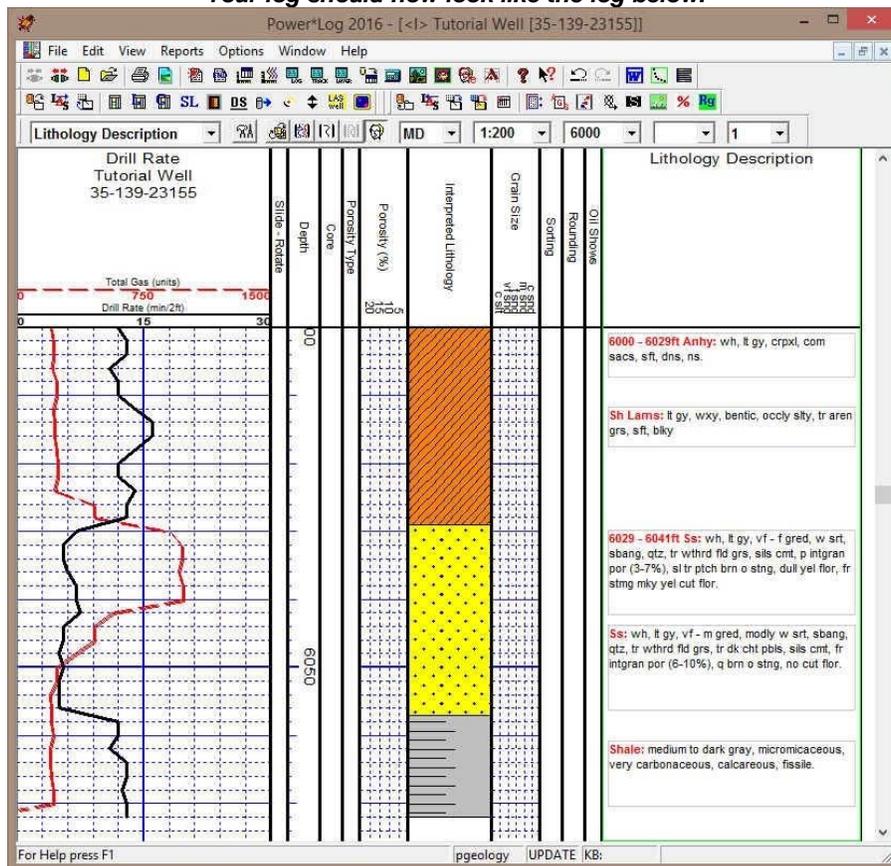

Drawing Porosity (%)

1.) **Double click** on the **Porosity (%)** track to activate the **Porosity Builder** window.

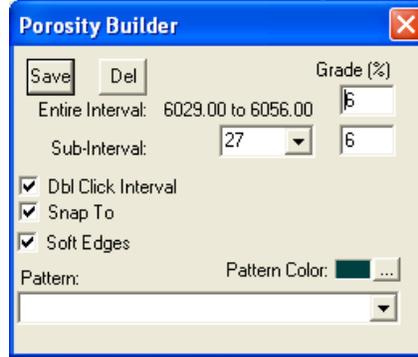


- 2.) **Double Click** the mouse pointer (with the **Dbl Click Interval** check box activated) between **6029'** and **6056' @ [6%]** **[6038' [6%]]** and the entire interval will be drawn accordingly in purple to represent an entire interval.
- 3.) **Click and drag** the mouse pointer from **6042' [8%]** to **6056'** **[6056' [8%]]**, release the mouse button, and the desired **Porosity Grade** will be drawn accordingly in green to represent a subinterval.

Note: The mouse pointer does NOT have to be dragged to the same percentage (%) point at the bottom of the interval, as you selected at the top of the interval: the mouse pointer needs only to be dragged to the desired depth.

• **Deleting Porosity (%) Entire or Subinterval...**

If you wish to delete a **Porosity (%)** subinterval or entire interval, while the **Porosity Builder** window is open, **right click within** the interval slated for deletion to activate a pop-up menu, and then left or **right click** on the appropriate selection.

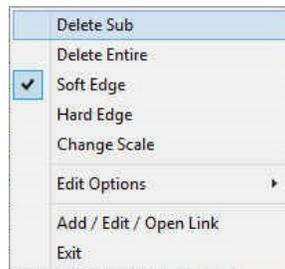

Drawing Grain Size

1.) **Double click** on the **Grain Size** track between **6029 ft** and **6056 ft** to activate the **Grain Size Builder** window.




2.) **Click and drag** the mouse pointer from **6029' [vf snd]** to **6056' [f snd]** **[6029' [vf snd]** **[6056' [f snd]]** on the **Grain Size** track.

Note: **Measured Depths** and **Grain Sizes**, like **6029' [vf snd]**, can be viewed within the mouse pointer display box, situated just to the right of the mouse pointer.

3.) **Release the mouse button** and the entire **Grain Size** interval will be drawn in purple to represent the entire interval accordingly.

• Drawing a Grain Size Sub-Interval...

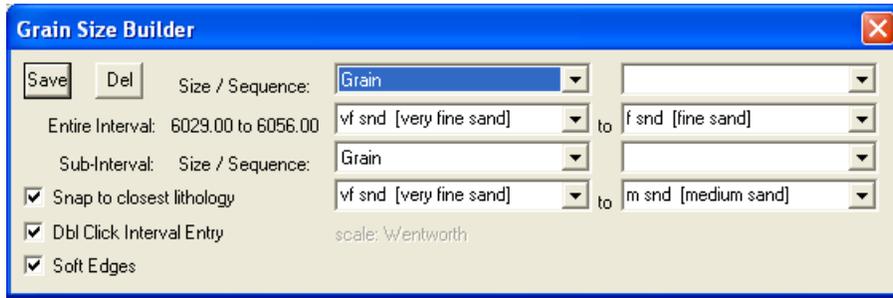

- 1.) Click and drag the mouse pointer from 6042' [vf snd] to 6056' [m snd]
- 2.) Release the mouse button and the Grain Size Sub-Interval will be drawn accordingly.
- 3.) To exit from the Grain Size Builder window and return to the log, press the Esc key on the keyboard once.


Note: If you happen to do something wrong remember you have an UNDO under the Edit Menu selection. Also there is an button on the Toolbar.

Drawing Oil Shows

- 1.) Double click on the Oil Show track between to activate the Oil Show Builder window.



- 2.) Right click anywhere within the depth interval of 6029' to 6056' on the Oil Show layer to activate the pop-up menu.

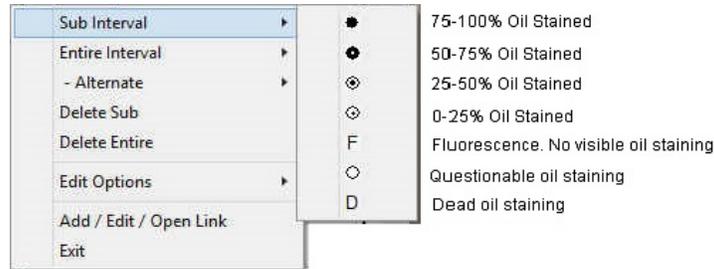


Note: The symbols utilized in the pop-up menu, represent a specific percentage (%) or amount of oil staining, as illustrated in the above diagram.


- 3.) Select 50-75% oil staining from the Sub Interval pop-up menu.
- 4.) Click and drag your mouse pointer from 6029' to 6041' and release the mouse button and this 12 ft sub-interval will be populated with the 50-75% oil staining symbol (●).

Drawing Sorting

- 1.) Double click on the Sorting track between 6029' and 6056' to activate the Sorting Builder window.

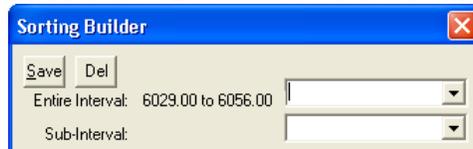

- 2.) Right click anywhere within the 6029' and 6056' Sorting interval to activate the pop-up menu.

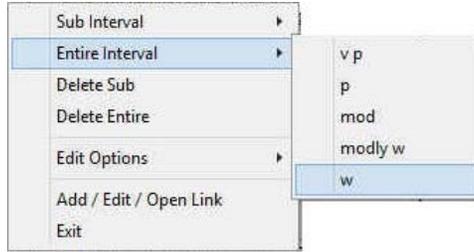

Note: Each of the abbreviations utilized in the pop-up menu represent a specific degree of **Sorting**.

3.) **Select w** for the **Entire Interval** from the pop-up menu and the entire bed will be populated with the **“W”** symbol.

• **Drawing a Sorting sub-interval...**


1.) **Right click** anywhere within the **Sorting Track** to activate the pop-up menu.

2.) **Select modly w** from the **Sub Interval** pop-out menu.


3.) **Click and drag** your mouse **from 6041' to 6056'** and one **15'** sub-interval will be populated with the **“mW”** symbol.

Drawing Rounding

1.) **Double click** on the **Rounding track** between **6029'** and **6056'** to activate the **Rounding Builder** window.

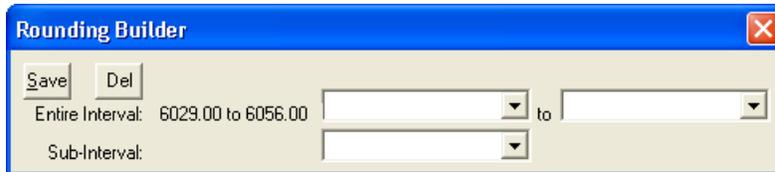


2.) **Right click** anywhere within the **6029'** and **6056'** **Rounding interval** to activate the pop-up menu

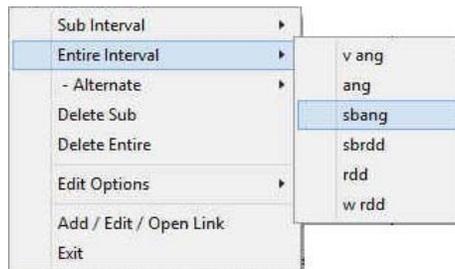


3.) **Select sbang** for the **Entire Interval** from the pop-up menu and the entire bed will be populated with the **“a”** symbol.

Drawing Porosity Type

1.) **Double click** on the **Porosity Type Track** to activate the **Porosity Type Builder** window

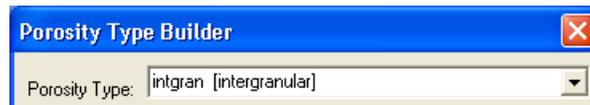

2.) **Right click** anywhere within the **Porosity Type track** activate the pop-up menu and then **select** types to activate the pop-out menu.

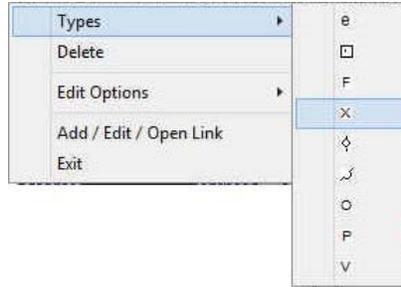


- 3.) **Select x** from the pop-up menu and **click at 6029', 6035', 6041', 6047' and 6053'** and "x's will appear at those depths.

Note: If you happen to do something wrong remember you have an **UNDO** under the **Edit Menu** selection. Also there is an  button on the Toolbar.


Drawing Slides on the Slide / Rotate Track

We can also import the slides and Toolface orientation but for this example we will do this manually. In the Power*Curve tutorial we will import the slides from a *.txt file.

- 1.) **Double click** on the **Slide - Rotate Track** to activate the **Slide – Rotate Builder** window

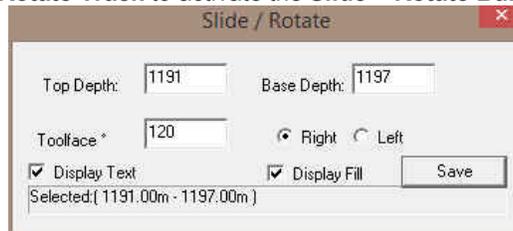


- 2.) **Click and drag** your mouse within the track from 6024 to 6027 ft  and then let go. The slide will automatically be drawn for you with an S.
- 3.) To enter the Toolface orientation **click on the slide** that you just dragged in and then **type 120** in the **Toolface field** and then **click on the Right radio button**.
- 4.) **Click on the  button.**
- 5.) To change the font orientation from the default Horizontal on the slide **right click on the Slide you just modified** with the Toolface to activate the pop out menu and **select the Vertical Orientation**.
- 6.) To **RESIZE** an interval you would **hold the CTRL key** and mouse over an end point of a slide to turn the mouse pointer into a resize arrow  **click and drag your mouse** to a new depth interval drawn. **OR Click on the interval** to place its attributes into the builder and then **type** in a new start or end depth and then **click on the  button.**
- 7.) To **DELETE** right click on the drawn interval and **select delete** from the pop-out menu.

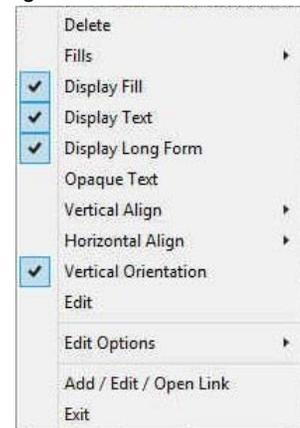


Drawing Accessories

Using **the log on page 35** as a guideline, add some **Accessories** to the log at your discretion. Listed below are the steps for adding **Accessories**:

- 1.) **Double click** anywhere within the **Interpreted Lithology** track to activate the **Rock Type Builder** window.

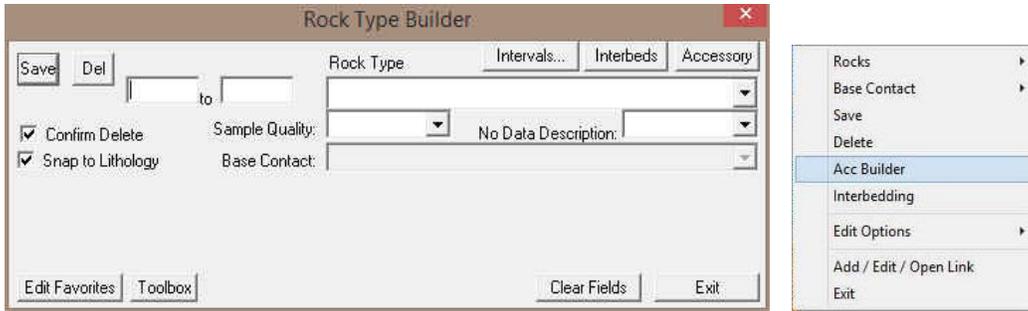

- 2.) Right click anywhere within the **Interpreted Lithology** track to activate the pop-up menu.
- 3.) Select **Acc Builder** from the pop-up menu to activate the **Rock Accessory Builder** window or click on the **Accessory** button in the Rock Type builder.

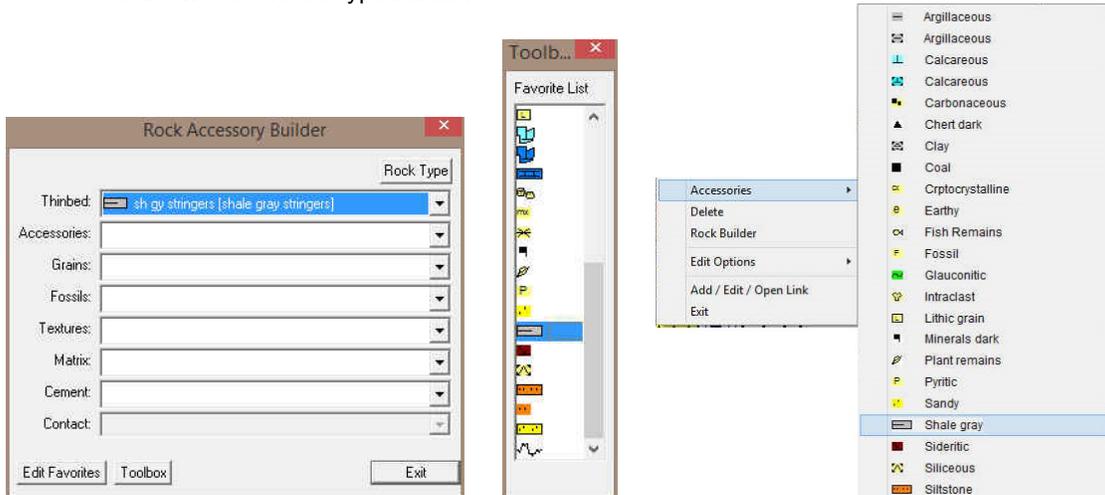

- 4.) Now the user can move the Toolbox Favorite List by clicking and dragging the menu bar to a convenient location.
- **Adding a Thinbed...**
 - 1.) Click on the symbol for **Shale Gray Stringers** from the Tool Box Favorites List and the **Thinbed** field in the **Rock Accessory Builder** window will be filled in with **sh gy stringer [shale gray stringers]**.
 - 2.) Click anywhere within existing **Interpreted Lithology** to insert the desired **Accessories**.
 - **Adding another Accessory...**
 - 1.) Click on the symbol for **Chert Dark Pebbles** from the Tool Box Favorites List and the **Thinbed** field in the **Rock Accessory Builder** window will be filled in with **cht dk pebbles [chert dark pebbles]**.
 - 2.) Click along the bottom of the **Sandstone** interval to insert the desired **Accessory**.

Note: When placing **Accessories** on the log, you may wish to increase the mouse accuracy from the default of **1** to **0.1**. This selection box is located to the left of the **LAS** button on the **Toolbar**.

- **Adding another Accessory...**
 - 1.) Click on the symbol for **Salt Casts** from the Tool Box Favorites List and the **Component** field in the **Rock Accessory Builder** window will be filled in with **sac [salt casts]**.
 - 2.) Click anywhere within the **Anhy(prim)** interval to insert the desired **Accessory**.
- **Adding another Accessory...**
 - 1.) Click on the symbol for **Silty** from the Tool Box Favorites List and the **Component** field in the **Rock Accessory Builder** window will be filled in with **slty [silty]**.
 - 2.) Click within the **Anhy (prim)** interval to insert the desired **Accessory/Accessories**.

Arenaceous Feldspar Grains

- **Adding Cement...**


- 1.) Click on the symbol for **Siliceous** from the Tool Box Favorites List and the **Cement** field in the **Rock Accessory Builder** window will be filled in with **sils [siliceous]**.
- 2.) Click anywhere within the existing **Interpreted Lithology** intervals, that you wish to insert the desired **Accessory/Accessories**.
- 3.) Press the **Esc** key on the keyboard to exit from the **Rock Accessory Builder** window.

Moving an Accessory

- 1.) Click and hold your mouse pointer down on the Accessory (see a red box) and drag to a new spot.


Deleting a single Accessory

1. With the **Rock Accessory Builder** window activated **right click** (in the upper right corner) of the **Accessory** symbol you wish to delete and the pop-out menu will be activated.
2. Click on the **Delete** selection from the pop-out menu and the selected **Accessory** symbol will be deleted.
3. Press the **Esc** key on the keyboard to exit from the **Rock Accessory Builder** window.

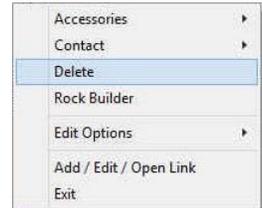


Deleting Multiple Accessories

1. With the **Rock Accessory Builder** window activated **Press and Hold the SHIFT Key** and then **click and drag an area** where the symbols are that you want to delete.
2. **Release the mouse button** and this will activate a message.




3. Click on the button. The accessories that were covered by your drag will be deleted. ****Your log should now look like the log below.****

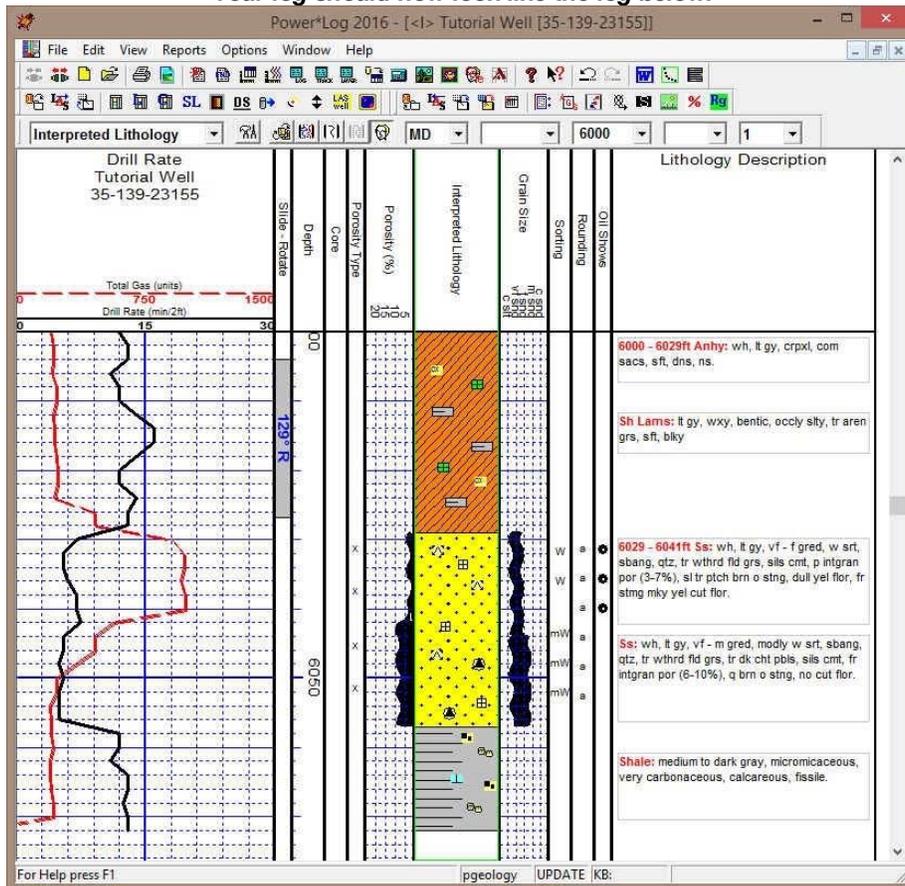

Adding a Cored Interval to the log

- 1.) Double click on the **Core** track to activate the **Well Core** report window.

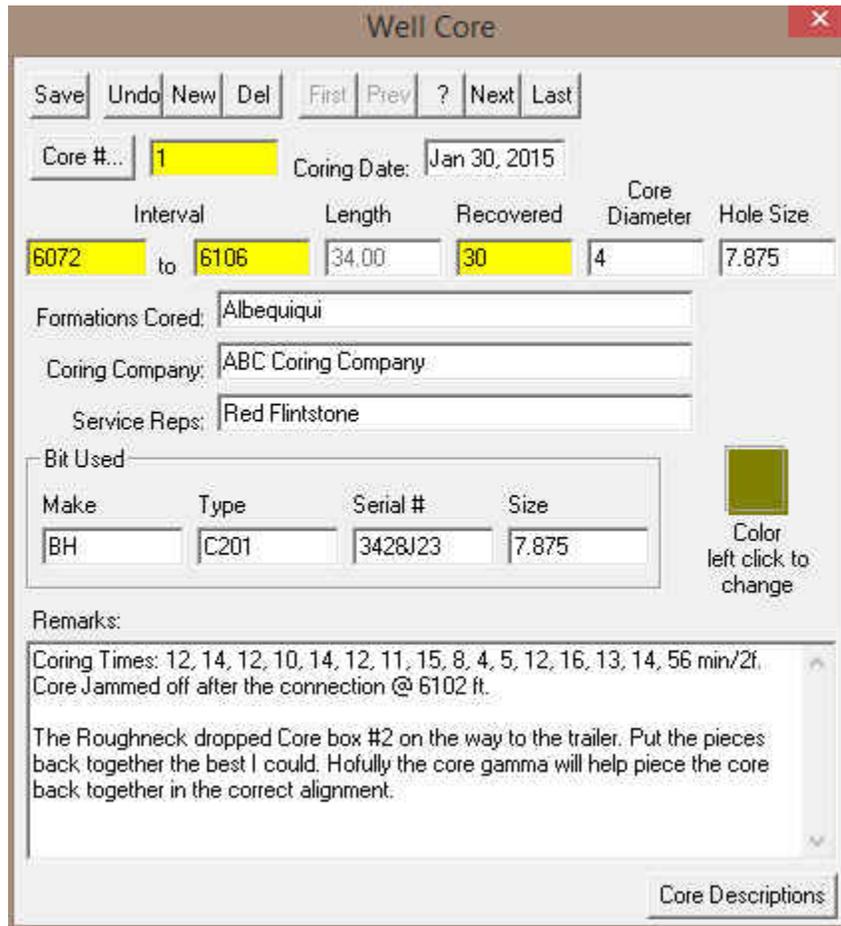

- 2.) Type 1 into the **Core #** field. **Tab key**.
- 3.) Type today's date into the **Coring Date** field, using the **Date Format (MMM DD, YYYY)**, selected in the **System Options** window at the beginning of this tutorial. **Tab key**.
- 4.) Type 6072 into the **Interval (From)** field, **Press the Tab key**, Type 6106 into the **Interval (To)** field, **Press the Tab key** and Type 32 into the **Recovered** field.
- 5.) The rest of the fields can be filled in. Only the yellow fields are mandatory. Remember to Tab between fields.
- 6.) Click on the **Save** button and select **Cancel** from the ensuing **Shortcut Options** window.



Adding Core Descriptions


- 1.) Click on the **Core Descriptions** button, in the Well Core window to activate the **Core Description** window.

- 2.) Type **6072** into the **Interval (From)** field, **tab** and Type **6085** into the **Interval (To)** field, **tab** and then Type **Sh / mnr – abnt Ss strgs** into the **Rock Type** field. **Tab** to get to the short description field.
- 3.) Type the following Core Description into the Short Description field, exactly as is:

Sh lt gy, occlly mot dk gy, micmica, v carb, slty, plty & fis. Occ tr Sid nods & unident fos deb. Ss strgs pred @ the top of zn, v thn <2 mm thk, s&p, vf gred, py srt, sbrdd, arg & tt / ns.

Note: The **Short or Long Descriptions** can be added to the **Lithology Description** layer (in the **Lithology Description** track and only the **Long Description** will still be printed out in the **Core Description Report** in the **Well End Report** window.

- 4.) Select the **Automatic Transfer**, **Transfer Depth Range** and **Transfer Short Form** check boxes () , as shown in the preceding sample description window.
- 5.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window. This will activate a System Verification Window asking you if you want to change your screen scale to 10" so you can see your description. Otherwise, it will not be shown.

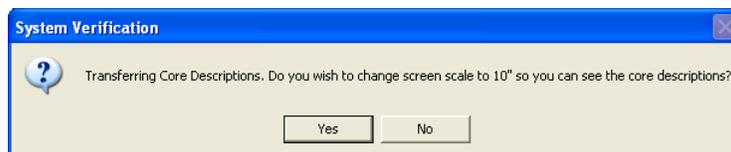

- 6.) Click on the **Yes** button. You will see your sample description on the log at 6070 ft with the options selected in step 4.

- **Adding another Core Description to a new interval...**

- 1.) Type **6090** into the **Interval (To)** field, **tab** and then Type **Ss** into the **Rock Type** field. **Tab** to get to the short description field.
- 2.) Type the following **Core Description** into the **Short Description** field, exactly as is:

s&p, m gred, w srt, sbrdd, qtz, cht, sils cmt, fr – g intgran por (16% - 18%), abnt brn o stng, bri yel flor, ex stmg yel cut flor.
- 3.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window.

Note: If you made any typing errors, you can make any necessary corrections now and then **Save** the record once again to overwrite the old record. You must first delete the description from the Lithology Description Layer.

• **Adding yet another Core Description to a new interval...**

- 1.) Type **6096** into the **Interval (To)** field, **tab** and then Type **Sh** into the **Rock Type** field. **Tab** to get to the short description field.
- 2.) Type the following **Core Description** into the **Short Description** field, exactly as is:
lt gy, occlly mot dk gy, micmica, v carb, slty, plty & fis.
- 3.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window.

• **Adding yet another Core Description to a new interval...**

- 1.) Type **6102** into the **Interval (To)** field, **tab** and then Type **Ss** into the **Rock Type** field. **Tab** to get to the short description field.
- 2.) Type the following **Core Description** into the **Short Description** field, exactly as it appears below:
s&p, m - vc gred, m srt, sbrdd - rdd, qtz, cht, tr sils cmt, g - ex intgran por (20% - 24%), v fri, v abnt brn o stng, bri yel flor, ex stmg yel cut flor.
- 3.) Click on the **Save** button and then select **Start New Record** from the ensuing **Shortcut Options** window.


• **Adding the last Core Description to a new interval...**

- 1.) Type **6106** into the **Interval (To)** field, **tab** and then Type **No Recy** into the **Rock Type** field. Click on the **To Long Desc** button. This will expand the abbreviated Rock type into the Long name Rock type field.
- 2.) Click on the **Save** button and then select **Exit** from the ensuing **Shortcut Options** window.


Editing Core Descriptions

Before we start editing the Core Descriptions on the Log we must first change our Screen scale from 1:120 to 1:48 so that all the descriptions will not be overlapping each other. This will make selecting them much easier.



- 1.) Click on **Log Scales**, under the **View** menu selection, to activate the **pop out menu** and then click on **Imperial** then click on the **1:48**. This will refresh your log with the new Scale. Or Click in the **Log Scales** field drop box and select 1:48.

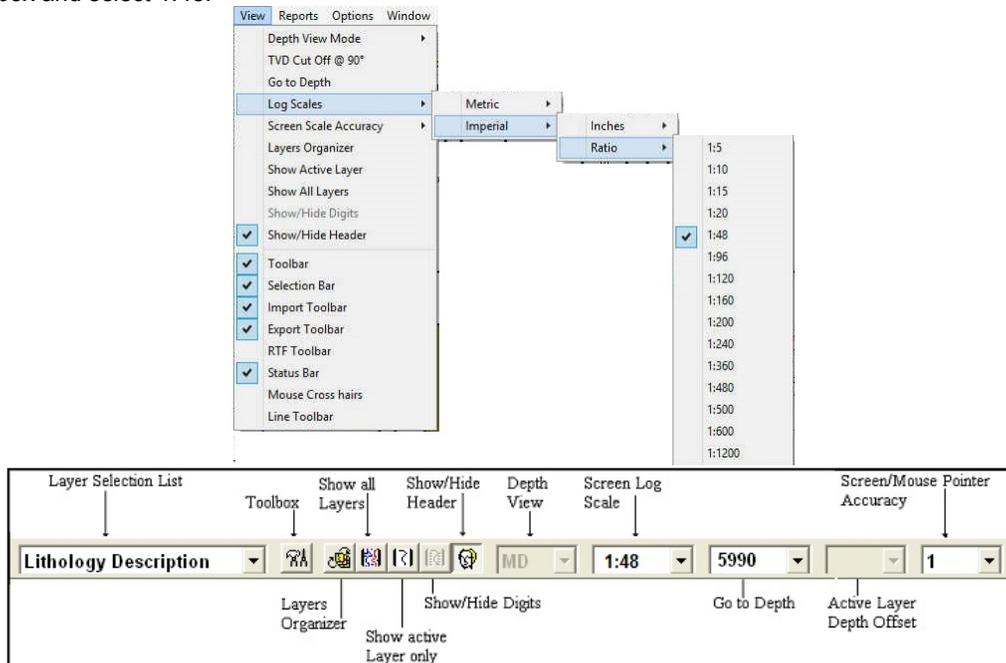

Moving and changing the Display Scale options

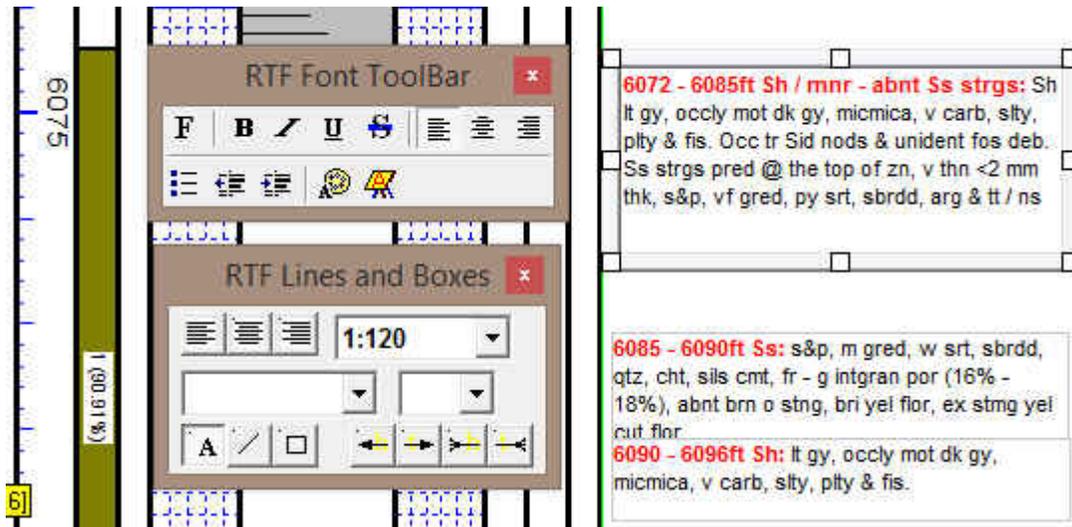

Changing the Display Scale options

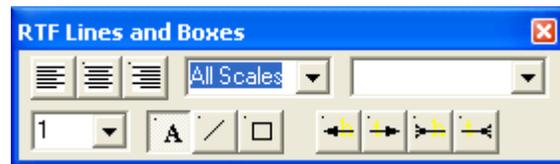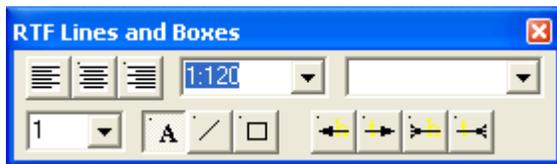

- 1.) Click on the **6096-6102 ft Core Description**. This will activate the RFT Font and Lines and Boxes toolbars and show a highlight around the selected annotations borders.
- 2.) To change the **Display Scale** of the **Core Description** now highlighted, simply **select All Scales** from the **display scale drop box** to replace the 120 in the RFT Lines and Boxes Toolbar. (When this is done the core description will display at all log viewing and printing scales.)
- 3.) **Move your mouse pointer** onto the bordered area on the lithology description track and so that the mouse pointer turns into  cross hairs and **click** and drag to move this description so that it can be read easily.
- 4.) **Click anywhere outside** the annotation to close down the RFT Builders.

Moving Core descriptions


- 1.) Click on the **Core Description** you wish to move.
- 2.) **Move your mouse pointer** onto the bordered area on the lithology description track and so that the mouse pointer turns into  cross hairs and **click** and drag to move this description so that it can be read easily. Release the mouse button, and the **Core Description** will be redrawn at its new location.

For a general guideline refer to the log example on page 45.

Resize the Moved Annotations to fit the track width

When annotations are moved or manually placed in an annotation layer, the user may want them fitting perfectly between the track edges.


- 1.) **Right Click** anywhere on the **lithology description layer**. This will activate the pop out menu.
- 2.) **Select Resize to Track**. This will activate the Format Range Window.
- 3.) Accept the Depth Interval by **Clicking** on the  **button**. This will resize the annotations to fit the track width.

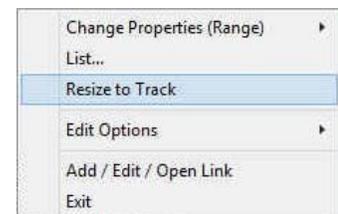

Deleting Core Descriptions


- 1.) Click on the **Core Description** you wish to delete to highlight it.

- 2.) **Right Click** anywhere inside the annotation to activate the pop up menu shown below.




- 3.) **Click** on the **Delete** selection.
- 4.) **Click anywhere outside** the annotation to close down the RFT Builders.

Adding a Core Rate curve layer to the log.

- 1.) Under the **Options** menu, **click on Log Configuration Builder** or **click on the  Log Configuration Builder button on the Toolbar** to activate the **Log Configuration Builder** window.
- 2.) On the left side **scroll down in the tracks portion** of the window until you can highlight the **Curves Track by clicking on it**.
- 3.) **Click on the Core Rate layer** in the layers portion of the window on the lower left side of the builder to highlight it. Also notice the **Layers** radio button on the left side gets activated.
- 4.) On the **right side (Active Log)** of the **Log Configuration Builder** window, **click on the Drilling Rate track** to highlight it. This is the track we want to add the Core Rate layer to.
- 5.) **Click on the  button** and you will be prompted with the following system message, **“Do you want to ADD the selected (layer) from the available log to the active log?”** **Click on the  button.**
- 6.) This will activate a **Get Name** window with **“Core Rate”** as the name in the **New Layer Name** field. **Click on the  button** and the **Core Rate** layer will then be added to the **Drilling Rate** track.

Note: The **Core Rate** curve has not yet been associated with the **Core Rate** layer. This will be done when the **Add Curve** window has been correctly filled in.



- 7.) **Click on the  button** to return to the log and the log will be initialized with the new layer, which in turn will generate an **Add Curve** window.

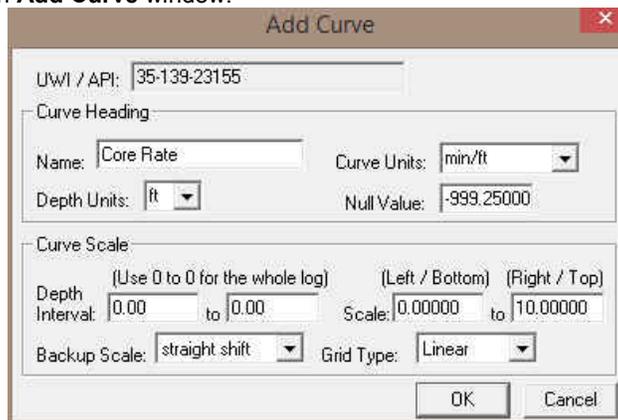


- 7.) **Click on  button** to add the curve layer to the Drill Rate Track.

Importing an LAS Core Rate Curve data file

1. **Click** on the **File** pull down menu selection and **click** on **Import** and then **click** on **LAS** from the pop out-menu or simply **click** on the  **LAS button**, on the **Import Toolbar**, to activate the **LAS Reader** window.

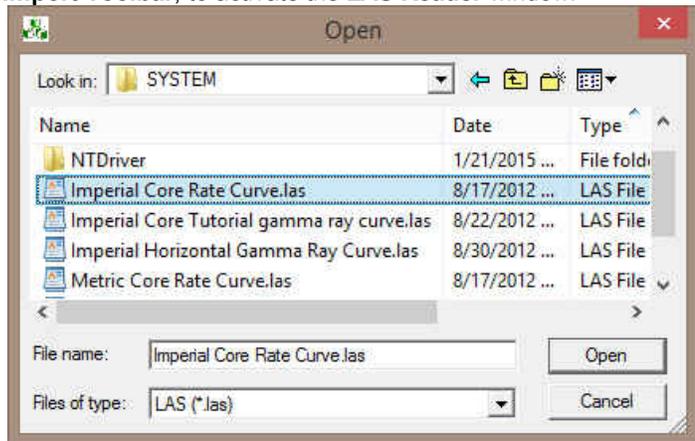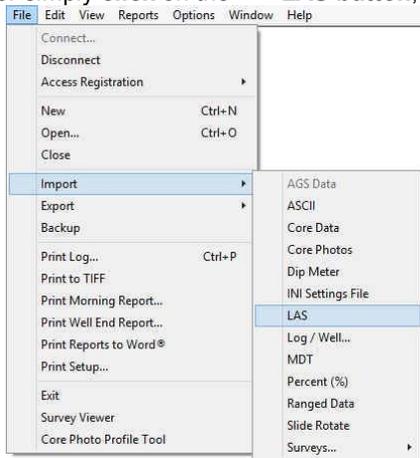

2. This will then activate the Open window which allows the user to select the LAS file you wish to import the data from. You can find the file in the PowerSuite_2015\System\Imperial Core Rate Curve.las and highlight the file by **clicking** on it **once** and then **click** on the  **Open** button. You will see the window shown below. We will default to the importing of Curve data.

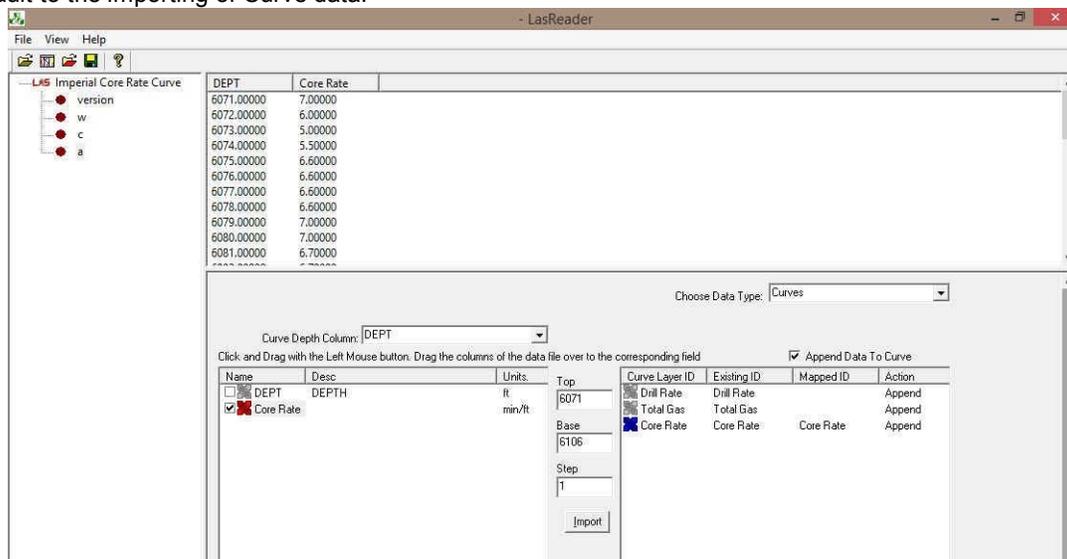


Overview of window

The **left hand side** of the **LAS Reader window** (shown on the right) allows the user to see the tree view of the data file format including the different data, parameter and definition blocks. The tree enables the user to select different sets of data or definitions. We have the choice to import these data types into the predefined data sets such as curves, Inclinometry, Tests, Tops and Core Data within the Power*Suite application. We default the window to select the log data or curve data if it is available

The **upper right hand side** of the **LAS Reader window** (shown to the right) allows the user to see the data associated with the different data and parameters and definition blocks.

The **bottom left hand side** of the LAS Reader window (Shown below left) displays the curve data sets that available to be imported. These can then be dragged to the import side of the LAS reader.

DEPT	Core Rate
6071.00000	7.00000
6072.00000	6.00000
6073.00000	5.00000
6074.00000	5.50000
6075.00000	6.60000
6076.00000	6.60000
6077.00000	6.60000
6078.00000	6.60000
6079.00000	7.00000
6080.00000	7.00000
6081.00000	6.70000

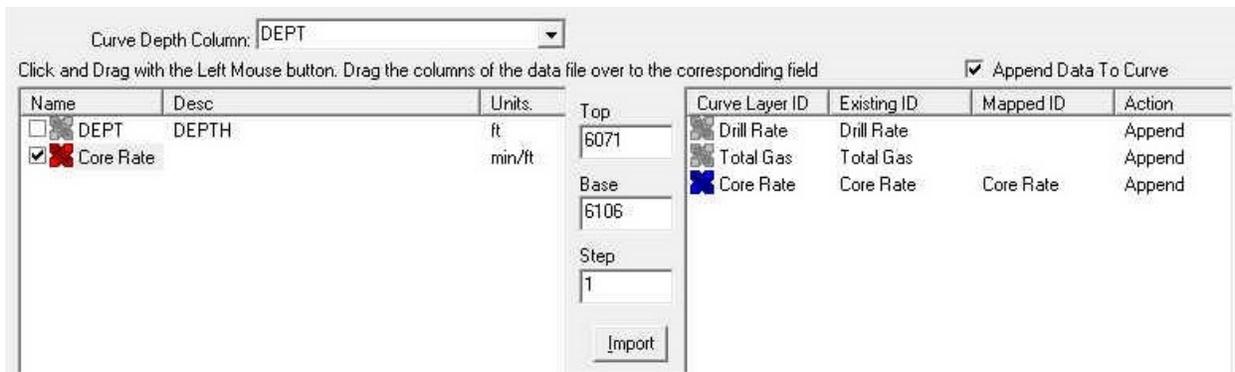


The **bottom right hand side** of the LAS Reader window (shown above right) shows the Import side displaying the Curve Layers and Curve names associated with the log that is open and active at the time the LAS Reader window was invoked.

Importing LAS Curve Data files

1. On the lower left side of the window **Click and drag** the **Core Rate curve** to the **Core Rate layer** on the lower right side and release it when the layer name becomes highlighted.

N.B. The user can **Right click** on the **Curve Layer ID** to remove the mapping or switch the action from append to replace. The Symbol color will either be purple for replace or blue for append.

2. **Click** on the  **button**. You will then be prompted with a system message after the import has finished.




3. **Acknowledge** the Finished Import message. **Click** on the  **button** and then **click** on the  **button** to exit or **click** on the **File menu** and **select the Exit** option to close the LAS Reader Window.

Adding Coring Times to the existing Drill Rate curve...

- 1.) **Select** the **Drill Rate** curve layer from the **Layer Selection List** field to make **Drill Rate** the active layer.
- 2.) Then, **Double click** on the **Drilling Rate** track to bring up the **Curve Editor** window for the **Drill Rate** curve layer.
- 3.) Change the **Auto Depth Increment** from one (1) to **two (2)** and then enter the following values into the **Curve Editor** window.

6072	13.0	6090	4.4
6074	11.5	6092	11.0
6076	13.2	6094	12.5
6078	13.2	6096	10.0
6080	14.0	6098	6.0
6082	13.4	6100	5.0
6084	13.0	6102	4.0
6086	8.5	6104	12.0
6088	4.8	6106	28.0

- 4.) **Click** on the  **button** to save your Drill Rate (Core Rate in min/m).

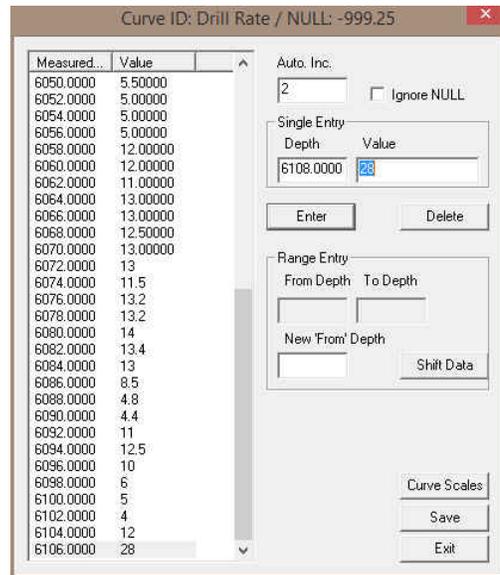


- **Changing Curve Scales in the Curve Editor window.**

- 1.) Click on the **Curve Scales** button in the Curve Editor window. This will activate a Curve Scale window. **We will be changing scales in our case at 6066'**




- 2.) Type in a different from Depth Interval changing the 0 to **6066** and then click on the **Save** Button. This will activate a System message stating Record Saved Successfully.

- 3.) Click on the **Start New Record** button. This will clear the window.

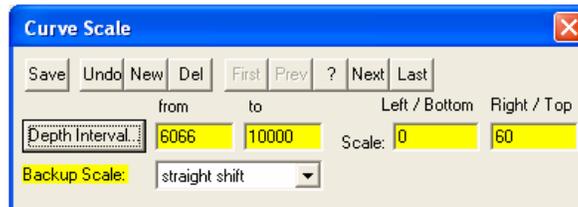


- 4.) Type in **6066** in the **from depth interval** field, **tab**, Type **10000** in the **to depth interval** field, **tab**, Type in **0** in the **left / bottom scale** field, Type in **60** in the **right / top scale** field, **select strait shift** from the **Backup Scale** drop box.
- 5.) Click on the **Save** button and then select **Exit** from the ensuing Record Saved Successfully message box.
- 6.) Press the **Esc key** on the keyboard or Click on the **Exit** button in the Curve Editor window to exit from the **Curve Editor** window. This will return you to the main log and you will now be able to view your drill rate additions and the change of scale.

****Your log should now look like the log below at 1:240 or 5" scale.****

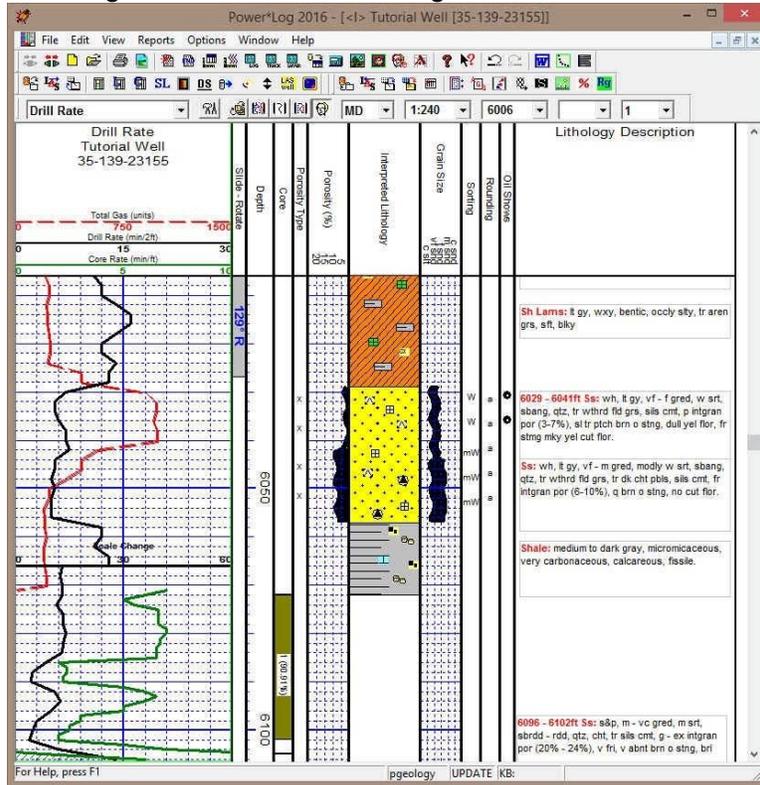

****Your log should now look like the log below at 1:120 or 10" scale.****

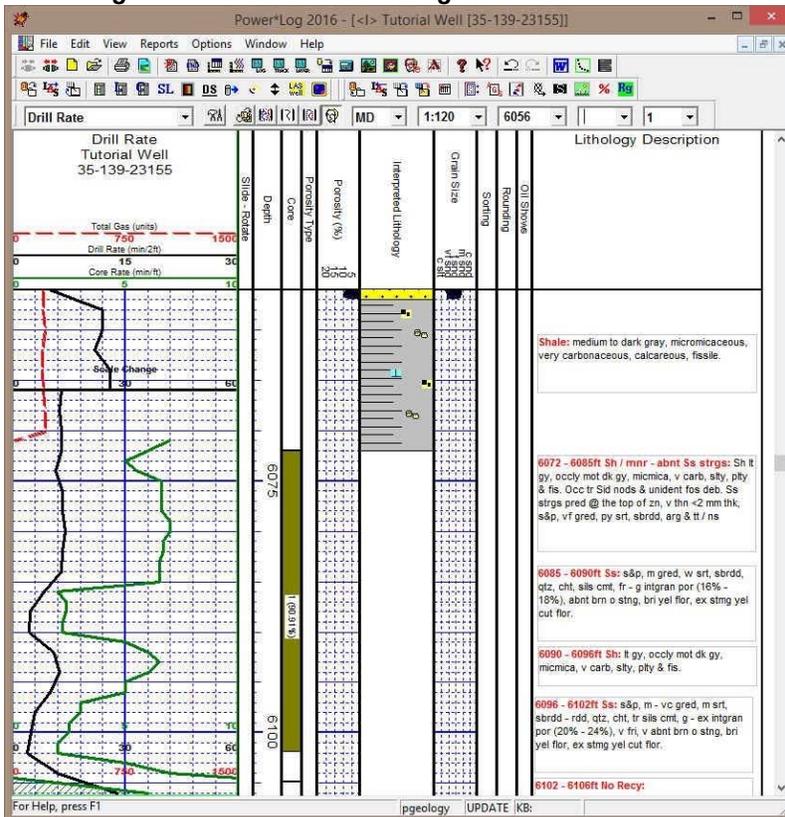

Adding a Formation Top

- 1.) Click on **Formation**, under **Reports** menu on the **Menu bar**, to activate the **Well Formation** window.

The screenshot shows the 'Well Formation' window with the following data entered:

- Group: s
- Formation: ab
- Member:
- Short: Santorini
- Long: Albuquerque
- K.B.: 82
- Ground: 71
- Casing Flange: 71
- Boundary Type: conf [conformable]
- Fault Type:
- Seq#:
- Long Name Display Depth:
- Subsea: -5994.87
- Alignment: right
- Era: mesozoic
- Series: lower
- Period: k [cretaceous]
- Stage: santonian
- Age: million years
- Thickness: MD: , TVD:
- Calculate Thickness button
- Tops: Prognosis: 6080, Sample: 6085, MD: 6076.87, TVD:
- Log:
- Display: Prog. (selected), Smpl., Log.

Evaluation:

The Albuquerque consists of Sandstone with minor Shale beds.
 The Sandstone is predominately white, light gray, very fine to medium grained, moderately well sorted, subangular, quartz, trace weathered feldspar grains, trace dark chert pebbles, siliceous cement, fair intergranular porosity (6-10%), questionable brown oil staining, no cut fluorescence.
 The Lower Sandstone is predominately salt and pepper, medium to very coarse grained, medium sorted, subrounded to rounded, quartz, chert, trace siliceous cement, good to excellent intergranular porosity (20% to 24%), very friable, very abundant brown oil staining, bright yellow fluorescence, excellent


Conclusion:

The Sands exhibit good hydrocarbon shows and excellent reservoir development. This is a zone of much interest and should be further evaluated on downhole logs.

*Note: Hold CTRL to drag display position


- 2.) Type **ab** into the **Formation Short name** field, **tab** and Type **Albuquerque** into the **Formation Long Name** field, select **Mesozoic** from the **Era Drop down box**, select **Lower** from the **Series Drop down box**, select **K [Cretaceous]** from the **Period Drop down box**, and select **Santonian** from the **Stage Drop down box**.
- 3.) Move the mouse pointer to the **Prognosis TVD field** and click. This will activate a cursor and type in **6080** in the **Prognosis TVD Top** field and press the **tab** key
- 4.) Type **6085** in the **Sample Top (MD)** field and press the **tab** key
- 5.) Type **6084.2** in the **Sample Top (TVD)** field.
- 6.) Click on the **Save** button and select **Exit** from the ensuing **Shortcut Options** window.

Draw the Interpreted Lithology (Please refer to the section on Drawing Interpreted Lithology earlier in this tutorial), for the Core Descriptions, that you have already created. Your Log should look fairly similar to the log illustrated below. To draw Lithology with more accuracy you may want to change the accuracy of your mouse pointer or the screen scale accuracy to from 1 foot (default) to a more detail mouse pointer. To do this click on View menu selection, select screen scale accuracy and select from the pop-out menu.

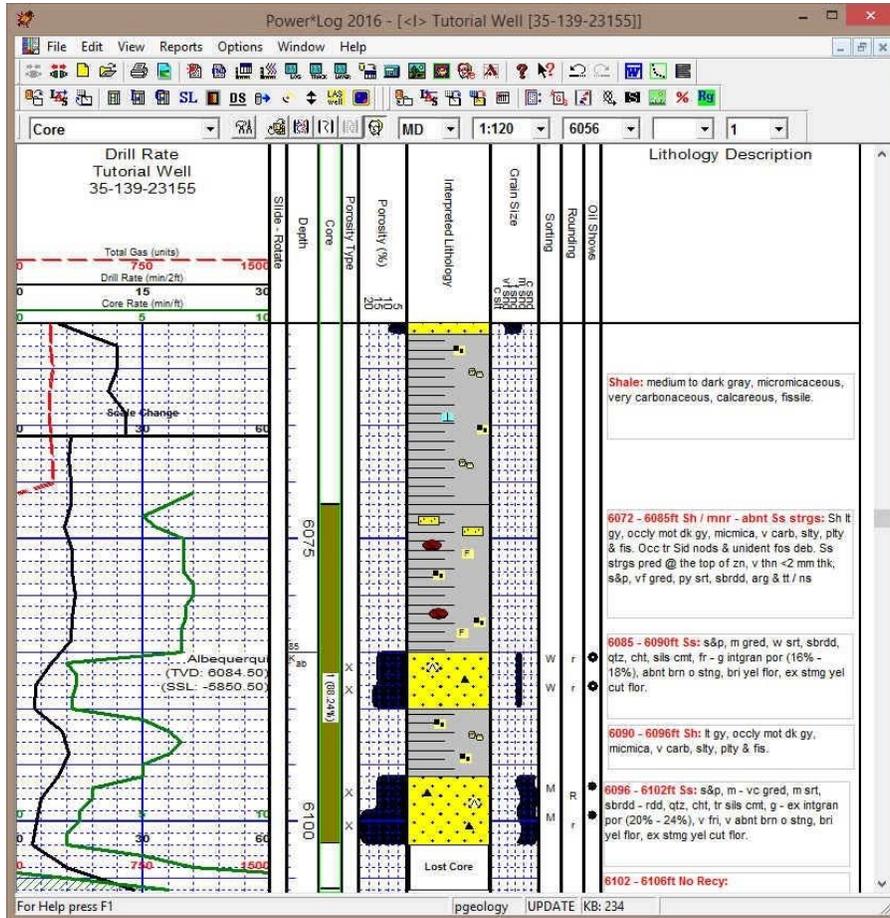


Adding Annotations

- 1.) Click on the **Drilling Rate** track to make it active (highlighted in green).
- 2.) Select **Eng - Mud Parameters**, as your active layer, from the **Layer Selection List** field.
- 3.) Click and drag an area within the **Drilling Rate** track with the left mouse button depressed on the layer to define where the annotation will be viewed which will activate the RTF Toolbars.

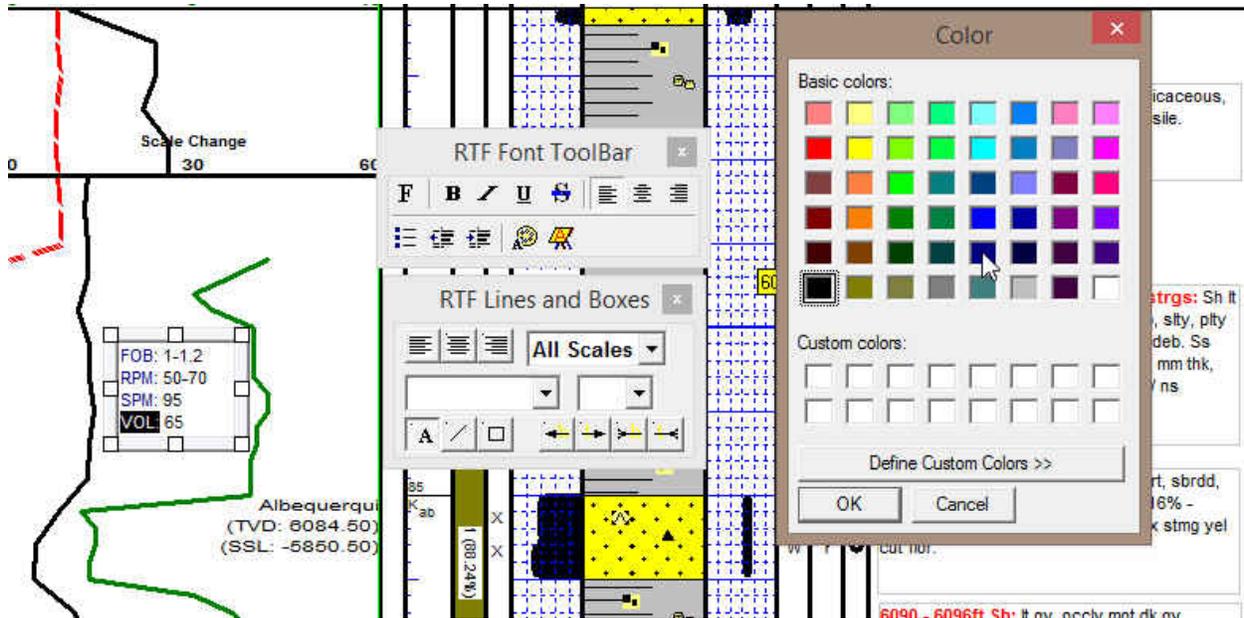

- 4.) **Type** the following into the text field in the annotation layer:
FOB: 1-1.2
RPM: 50-70
SPM: 95
VOL: 65
- 5.) To change the Font Color **Highlight the Text you want to change by dragging the Mouse over the text** to highlight the letters.
- 6.) **Click** on the  button in the RFT Font toolbar. This will activate the color palette.
- 7.) **Click** on the **new color** and then **click** on the  button.
- 8.) **Click anywhere outside the text box** to save your annotation.

Adding a Curve Fill layer to an existing log

- 1.) **Click** on **Log Configuration Builder**, under **Options**, or use the **Log Configuration Builder**  button on the **Toolbar** to activate the **Log Configuration Builder** window.
- 2.) On the left side of the window, **click** on the **Curve fill track** containing the Curve fill layer.
- 3.) **Click** on the **Curve Fill Layer**, that you wish to add to your log, within the **Layers** section on the left side of the **Log Configuration Builder** window. You should notice the  **Layers** radio button become activated
- 4.) On the right side of the window, **highlight** the **Drill Rate** track so that you add the selected Curve Fill layer to this track.
- 5.) **Click** on the  button to add the selected layer to the track on your log and the following system message will be activated, "**Do you want to ADD the selected <LAYER> from the available log to the active log?**"
- 6.) **Click** on the  button to activate the **Get Name** window.
- 7.) You now have the option of either renaming the layer or simply leaving it with its original name. **Type in ROP/TG Curve Fill.**


Note: Two layers cannot share the same name. Accordingly, no layer will be added to your track if they share the same name as a layer that already exists on the active(your) track.

- 8.) Click on the  button to add the layer to your log and place its name in the active **Layers** list on the right side of the **Log Configuration Builder** window.
- 9.) Click on the  button to get out of the Log Configuration Builder Window. . This should activate the Curve fill option window. If so skip to step 3 in the setup directions.

Setting up the (2) Two Curve Fill options

Once the layer has been added to your log the user can now utilize the curve fill layer.

- 1.) To set the Curve Fill Options the user must first make the Curve Fill Layer active. To do so the user must **Click on the Drill Rate Track** containing the Curve Fill layer and then selecting the **ROP/TG Curve Fill** layer from the **Layer Selection List** field at the far left of the **Selection Bar**.
- 2.) **Double click** anywhere within the **Curve Fill** or layer to activate the **Curve Fill Options** window
- 3.) Click on the  button. This will activate a list of curves associated with this well.
- 4.) Click on the **Drill Rate** and then click on the  button or **double click** on the **Drill Rate Curve**. You will now view the curve name below the  button.
- 5.) Click on the  button. This will activate a list of curves associated with this well.
- 6.) Click on the **Total Gas Curve** and then click on the  button or **double click** on the **Total Gas Curve**. You will now view the curve name below the  button.

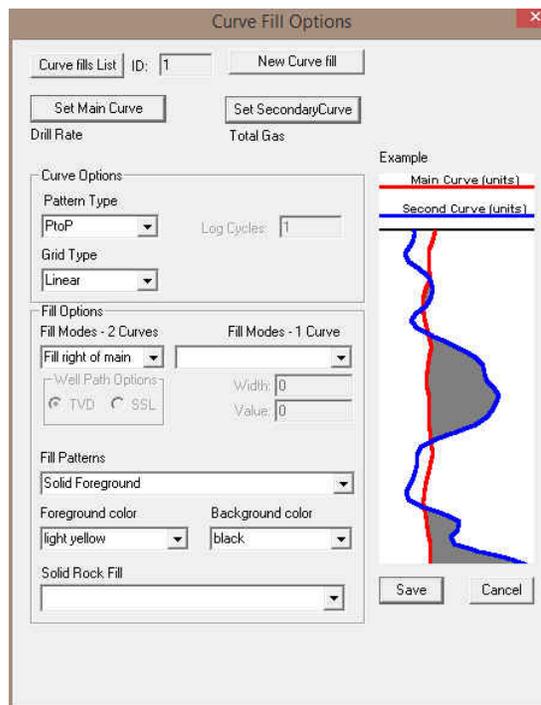

Curve Options Portion of the Window. This information is pertaining to the Main Curve and its Curve attributes.

- 7.) Click on the **Pattern Type** down arrow and **select** the correct **curve pattern** for the main curve. The Drill Rate Curve is defaulted to PtoP (Point to Point).
- 8.) Click on the **Grid Type** down arrow and **select** the correct **curve grid type** for the main curve. The Drill Rate Curve is defaulted to Linear.

Fill Options Portion of the Window (2-Two Curves)


- 9.) Click on the **Fill Modes – 2 Curve** down arrow and **select** the **Fill Right of Main**.
- 10.) Click on the **Fill Patterns** down arrow and **select solid foreground**.
- 11.) Click on the **Foreground Color** down arrow and **select yellow**.
- 12.) Click on the  button. The Curve Fill Options window will close and the changes you have made will be shown on the layer.

Layers Organizer

The **Layers Organizer** allows the user to set **priority to the layers** that are in a track. Also allows the user to **move a curves grid pattern up over top of others data**. As you can see now the **Curve fill** takes **president over the curve grid pattern**. You can only organize the **one grid at a time**.

1. Click on the **Drilling Progress Track**. It will highlight with a green outline.
2. **Select** the **Drill Rate** Curve layer form the Layer Selection List.

3. Click on **Layers Organizer**, under the **View** menu selection, or click on the  **Layers Organizer button** on the **Toolbar** to activate the **Layers Organizer** window for the Drilling Progress track.

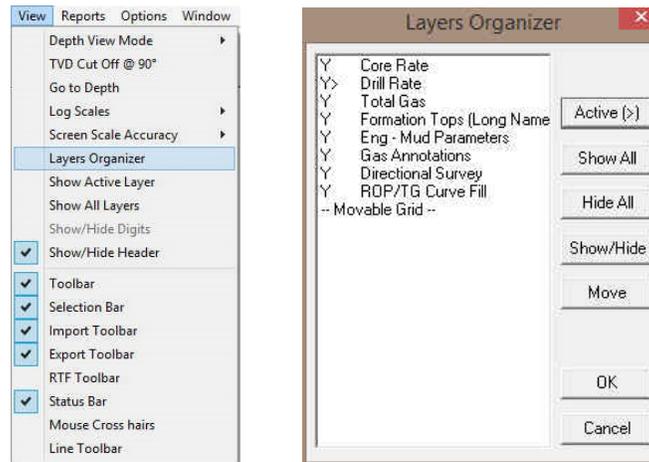


The order of the layers on this list determines the order in which the layers are drawn on the track. The layer at the top of the list is drawn last and the layer at the bottom is drawn first. It's a good idea to put the most important layers nearest the top of the list, so that when drawn they are on the top. Remember that the active layer displays its grid pattern.

The layers that are shown on the track are marked with a "Y", the hidden layers are marked with an "N", and the active layer is denoted with a ">".

To show all layers, click on the  **Show All** button. To hide all layers, click on the  **Hide All** button. To toggle a specific layer between show and hide, highlight the layer and click on the  **Show/Hide** button. You may also double click on a layer to change its current state. To make a layer active, highlight it and click on the  **Active (>)** button.


Moving the Grid for an Active Curve layer...

- Highlight the **Movable Grid** (associated with the Drill Rate Curve because it is the active layer) selection and click on the  **Move** button, which will then display, .
- Click on the ROP/TG Curve Fill layer and the grid pattern will move above and the **Movable Grid** selection will then move one line above the selected layer.
- Click on the  **OK** button to exit from the **Layers Organizer** window.

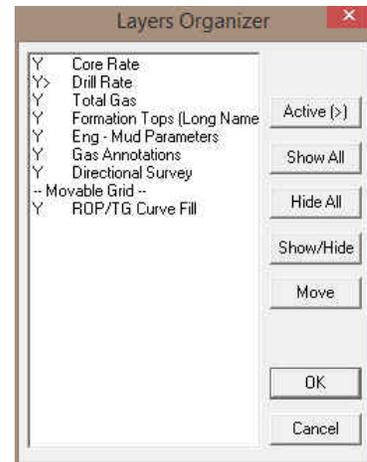

Note: You will have to repeat all the steps above to get the Movable grid associated with each curve above the ROP/TG Curve Fill layer. The Layers Organizer will only save data on exit. So you must exit after each layers moveable grid has been moved.


*** Your Log should now look like the picture shown below***

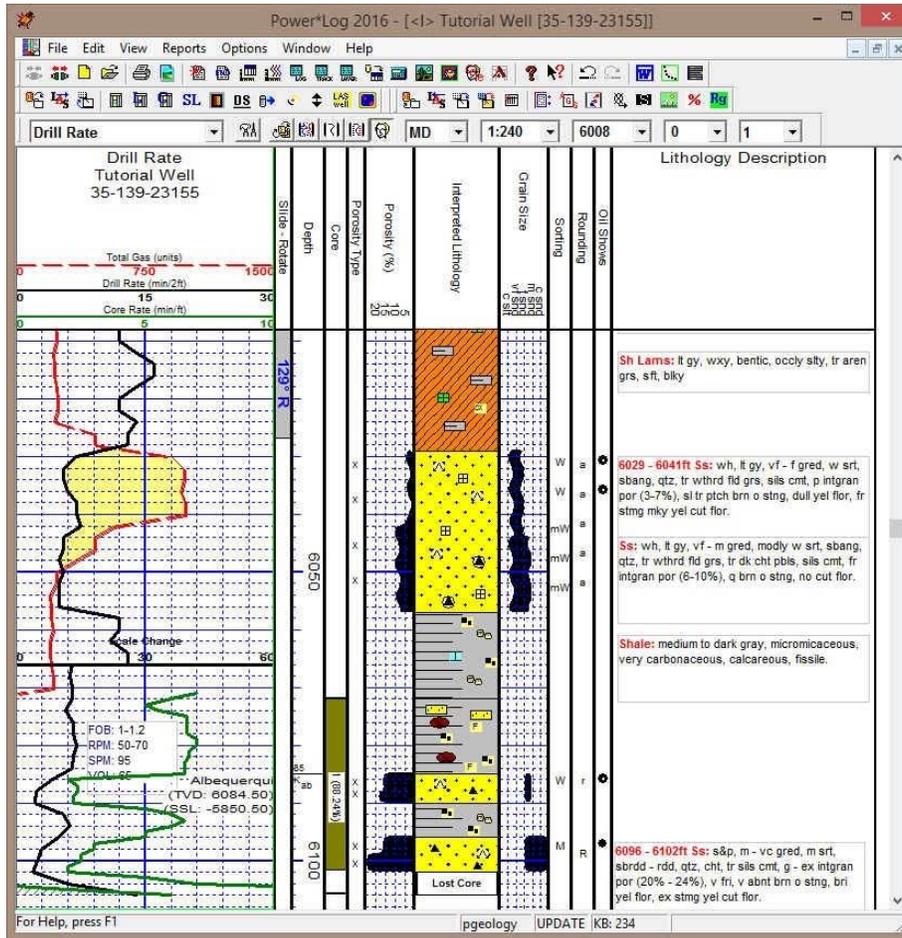

How to Print the Log to a Printer Driver.

- 1.) Under the **File** menu, click on **Print Log** or click on the **Print**  button on the **Toolbar** to activate the **Print Log** window.

Note: The Title bar and all depths associated with the Print Log window are defaulted to the Depth View that Power*Log is set to at the time of the activation of the Print Log window.

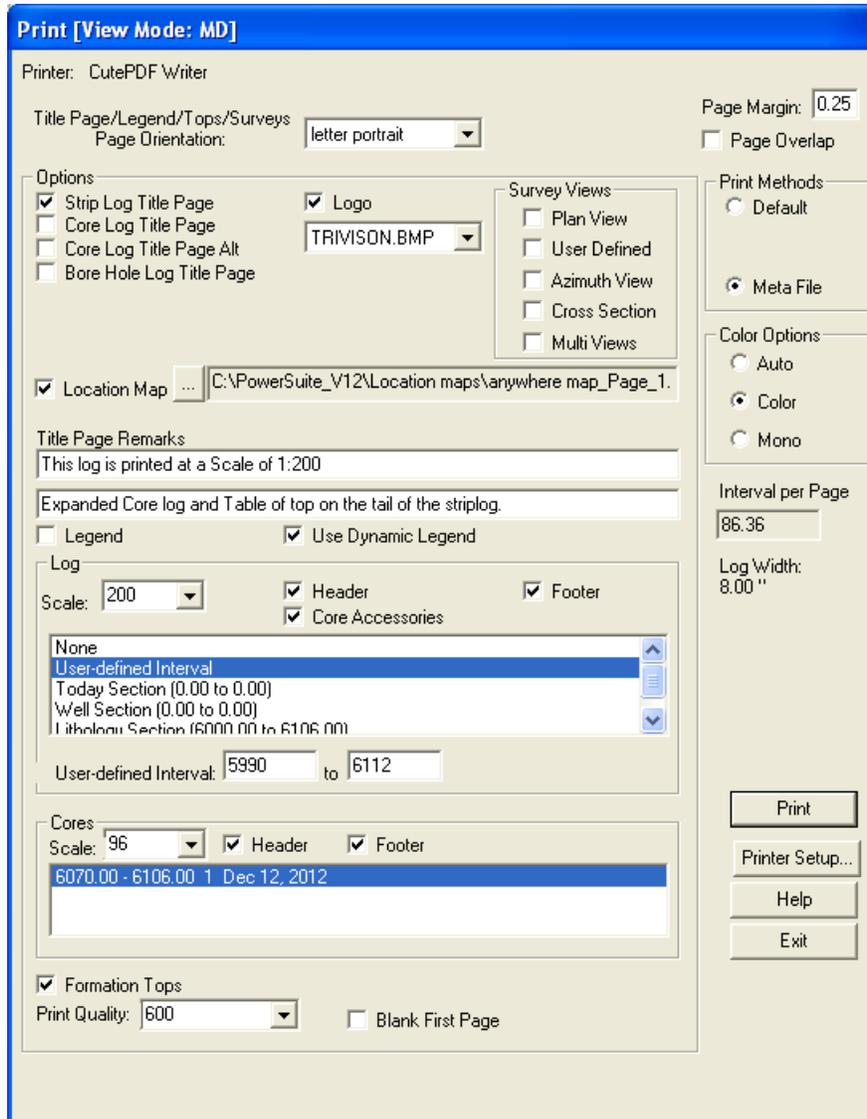

Print [View Mode: MD]

Printer: CutePDF Writer

Title Page/Legend/Tops/Surveys
Page Orientation: letter portrait

Page Margin: 0.25
 Page Overlap

Options:

- Strip Log Title Page
- Core Log Title Page
- Core Log Title Page Alt
- Bore Hole Log Title Page
- Logo
- TRIVISON.BMP

Survey Views:

- Plan View
- User Defined
- Azimuth View
- Cross Section
- Multi Views

Print Methods:

- Default
- Meta File

Color Options:

- Auto
- Color
- Mono

Interval per Page: 86.36
Log Width: 8.00 "

Location Map ... C:\PowerSuite_V12\Location maps\anywhere map_Page_1.

Title Page Remarks
This log is printed at a Scale of 1:200

Expanded Core log and Table of top on the tail of the striplog.

Legend Use Dynamic Legend

Log

Scale: 200

- Header
- Footer
- Core Accessories

None
User-defined Interval
Today Section (0.00 to 0.00)
Well Section (0.00 to 0.00)
Lithology Section (6000.00 to 6106.00)

User-defined Interval: 5990 to 6112

Cores

Scale: 96

- Header
- Footer

6070.00 - 6106.00 1 Dec 12, 2012

Formation Tops

Print Quality: 600 Blank First Page

Print
Printer Setup...
Help
Exit

- 2.) Select the **letter portrait** (because your log is **8" wide**) from the **Page Orientation** drop box field and the **Title Page**, **Legend**, and **Formation Tops** will automatically conform to the selected orientation.

Note: The selection of letter, legal or tabloid (landscape or portrait) settings from within this **Print Log** window will **NOT** override the paper orientation settings selected in the printer's **Properties** window. Therefore, you must also modify the paper orientation settings in your Printer setup **Properties** window to select the corresponding paper size and orientation.

- 3.) **Activate** the **Dynamic Legend** check box , if you wish to have the legend to reflect only the symbols printed on the log or core portions of the printed intervals defined in the log and core portions of the print log window.

In the Log portion of the Print Log window

- 1.) **Select 1:200** from the scale drop box for the log to be printed out at.
- 2.) **Click** to activate the **Header** and **Footer** check boxes to print the track headers / footers on the log.
- 3.) **Click** on **Lithology Section** to highlight it in the printing options selection box.

Note: The log itself must be displayed in whatever depth view you wish to print before you activate the print log window. To change the log to the desired format refer to depth view under the view pull down menu.

Page Margin The page margin field is available, primarily, when you are printing to Adobe Acrobat writer. When a numerical value in inches is typed into this field it will initiate a top and left margin for the templates (Title Page, Legend and Formation Tops) as well as a left margin for the main log.

Page Overlap Activate the **Page Overlap** check box if you are printing on single sheets. This will force the printer to include an additional 1/4 inch of the log at the top and bottom of each page, so that you can cut-and-paste pages manually, if you so desire.

Print Methods...

Default Activating the **Default** radio button forces Power*Log / Curve / Core to use a **raster or bitmap graphic printing method**. This printing method is generally used with Laser printers but not exclusively so.

Meta File Activating the **Meta File** radio button forces Power*Log / Curve / Core to use the **meta file technology printing method**. This printing method was developed for the newer models of printers on the market today as well as using the Adobe Acrobat Distiller or pdf printing technology.

Color Options...

Auto Activating the Auto radio button forces Power*Log / Curve / Core to use the settings from the printer driver to printout the log.

Color Activating the Color radio button forces Power*Log / Curve / Core to override the printer driver settings and consequently Power*Log / Curve / Core assumes that you are using a color printer.

Mono Activating the Mono radio button forces Power*Log / Curve / Core to override the printer driver settings and consequently Power*Log / Curve / Core assumes that you are using a monochrome (black and white) printer.

Interval per page field indicates how many meters of log will fit on a page of selected paper size and orientation selected in the setup as well as what log scale you are printing at. This will help indicate to the user how many pages will be required by the print job.

- 1.) **Click** on the Core Section **6070-6106** Core 1 to highlight it.
- 2.) **Select** the Core log scale of 1:96 and the **Core Track Header** and **Footer** check boxes .
- 3.) **Click** on the button to activate the **Print Setup** window and confirm that the correct printer settings are in effect.

Note: If you are printing out logs in color, you must activate the **Diffusion** or **Error Diffusion** option normally found under **Graphics** in the **Properties** window for most printers.

- 4.) When you are ready to print your log, **click** on the button.


Note: If you do exit from the **Print Log** window, you will be asked if you wish to save the print settings. If you **click** on **Yes**, the program will remember every setting that you made to the **Print Log** window and then will default to those settings the next time you enter the **Print Log** window.

How to Print the Log to a TIFF (file format)

Prints all or part of your log/well along with the Title page, location map, legends, survey views, individualized cores and formation tops on a continuous basis in a tiff file format.

- Under the **File** menu selection, **click on Print to TIFF or click on the  Print to TIFF button** on the Toolbar to activate the **Print to TIFF** window shown below:

Note: The depth views associated with the Print TIFF window are defaulted to the Depth View that Power*Log / Curve / Core is in at the time of the activation of the Print to TIFF window.

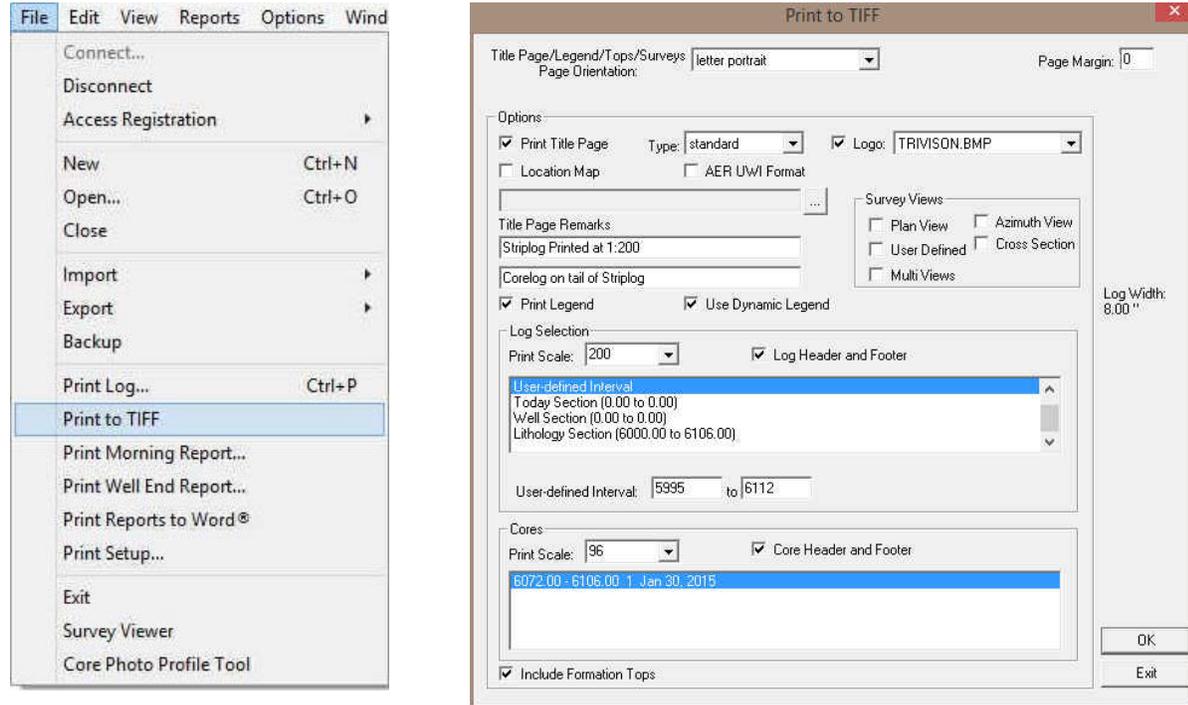

- Title Page/Legend/Tops/Surveys Page Orientation:

Select letter Portrait from the drop box field for the **Title Page, Legend, Tops, Survey Views** and they will automatically conform to the selected orientation. There are four (6) types of paper orientation to choose from. But your log is 8" wide so letter portrait is the page orientation.
- Print Title Page** **Select this check box** , to printout a Title Page.
- The Type (Title Page) drop box displayed on the right allow you to pick the appropriate title page format to print. **Select standard** to prints out our full blown title page with most of the Wells data.
- AER UWI Format** Select the AER UWI format for the Title page as the well is in Alberta.

N.B. This format changes our UWI printout from 100121605812W500 to 00/12-16-058-12W5/0 only on the Striplog Title page. All other UWI formats (DLS and NAME) remain the same.

- Logo**

TRIVISON.BMP

6. Activate this check box , if you wish to printout a logo, and then select a logo from the **Logo** drop box field.

Note: The logo file format must be a bitmap image file (*.bmp) if you want a logo printed out on the title page. Also, it is recommended that the bitmap image should be a square image, because **Power*Suite** will shrink or expand the image to fit the logo space on the **Title Page**. This bitmap must be placed in the **Powersuite_2015\logo** directory for the application to find it.

- Type any pertinent comments into the **Title Page Remarks** field and they will be displayed accordingly on the **Strip Log Title Page only**.
- Deselect** the **Location Map** check box. In our Case we do not have a location map so **deactivate** this check box . If you wish to printout a location map following the title page, and


then the user select a location map from your computers drives by clicking on the  and finding the file you want to print out as a location map.

Note: The location map file format must be a bitmap image file (*.bmp) if you want a location map to be printed out. Also, the bitmap image must be a square image, because **Power*Suite** will shrink or expand the image to fit the location map space following the **Title Page**. This bitmap can be placed anywhere as the file location is saved within the Power*Suite initialization file. (pgeology.ini)

9. **Deselect** the Survey views Plan View check box.
10. **Deselect** the Survey views User Defined check box.
11. **Deselect** the Survey views Azimuth View check box.
12. **Deselect** the Survey views Cross Section check box.
13. **Deselect** the Survey Multi Views check box.
14. **Select** the Legend to activate this check box .
15. **Select** the Use Dynamic Legend to activate this check box , because we want the legend reflect only the symbols printed on the log or core portions of the printed intervals defined in the log and core portions of the print log window.

In the Log portion of the Print Log window


16. Print Scale: **Select 1:200** or type in the **Scale** for the main log to be printed out at, in the **Scale** drop box field.
17. **Select** Log Header and Footer to activate this check box to have the track headers /footers printed out with the main log.
18. **Select** Core Accessories to activate this check box to have the core accessories printed out on the main log.
19. **Select** the **defined interval. Type** in **5995** and **6112** in the **from** and to **fields**.

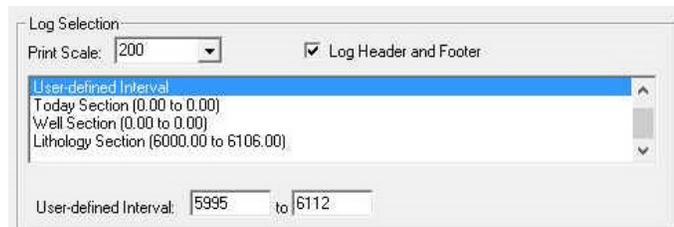

Note: The log itself must be displayed in whatever depth view you wish to print before you activate the print log window. To change the log to the desired format, refer to depth view under the view pull down menu.


In the Cores portion of the Print Log Window


20. Highlight Core 1 highlighting them.
21. **Select 1:96** or type in the **Scale** for the core log to be printed out at in the **Scale** drop box field.
22. Core Header and Footer Activate this check box to have the track headers / footers printed out with the core log.

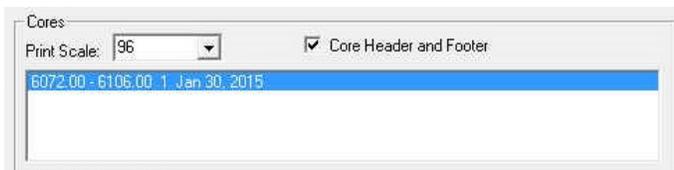

Note: A separate **Header Information Box** is automatically printed out with every **Core** and includes the **Core Scale, Core Date, Core Number, Cored Interval, Amount Cut, Amount Recovered, and Percentage**.

23. Formation Tops Activate this check box if you wish to printout **Formation Tops** and the **Formation Tops** will be included on a separate page at the end of the log printout.
 Page Margin: The page margin field is available, primarily, when you are printing to Adobe Acrobat writer. **This is not necessary for printing to tiff file format**


24. When you are ready to print your log, **click** on the  **button**.
25. This will activate a message box indicating the size of your printout. Click on the  button.
26. This will activate a file name window to be filled in with a file name and location to where you can locate it for further reference.



Note: If you do **exit** from the **Print to TIFF window**, you will be asked **if you wish to save the print settings**. **If you click on Yes**, the program will remember every setting that you made to the **Print to TIFF window** and then will default to those settings the next time you enter the Print to TIFF window


Adding a Link (Attachment) to your Log


1.) In our case **Right Click** on the **Lithology Description** layer to activate the pop out menu.

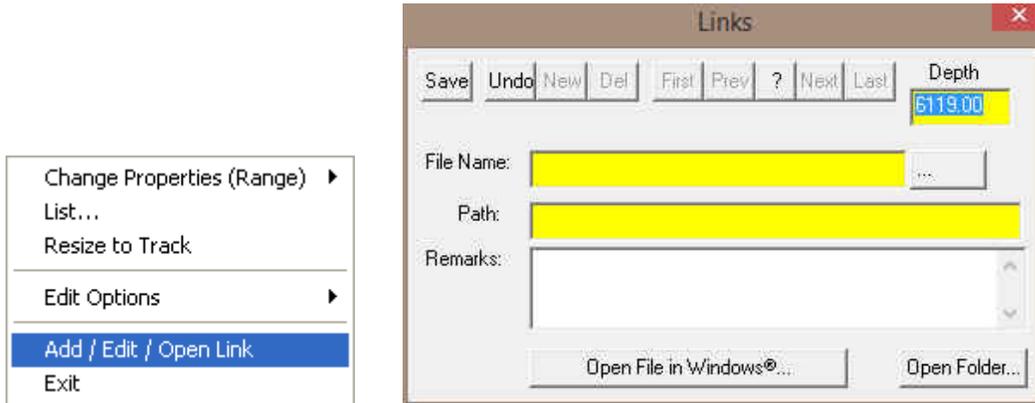

2.) **Select Add / Edit / Open Link** from the pop out menu. This will activate a blank Links window with the depth you right clicked at.

3.) **Click** on the  **button** in the Links window and you can now pick any windows compatible file. In our case I am linking the printed well file from the next section of the tutorial printed to my backup folder and then **click** on the  **button**. This will fill in in the details of the File Name and location in this window.

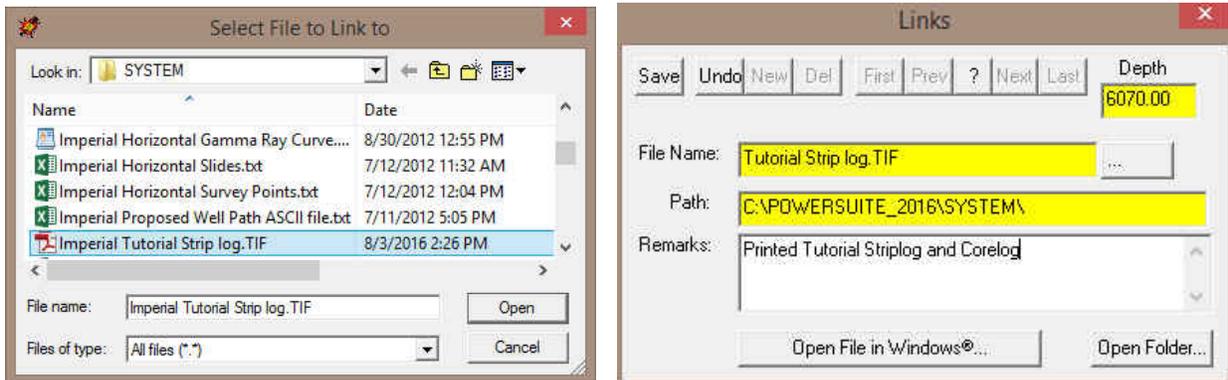

4.) Now the user can **Type** in some **remarks** to tell the viewer what the file is (if the user would like to identify the file) and then **click** on the  **button**. This will activate the Shortcut Options Window.



5.) **Click** on the  **button**. This will insert the paperclip symbol  where you originally right clicked and link the file to the log.

This concludes the Power*Log Tutorial. If you need help with specific functions or operations, please use the Table of Contents in the Power*Suite User Manual to find the desired topic or use the Search function built into the On-line Help.